



# Non-Polluting Composites Repair and Remanufacturing for Military Applications: Induction-Based Processing

by Bruce K. Fink, Nicholas B. Shevchenko, James M. Sands,  
Shridhar Yarlagadda, and John W. Gillespie, Jr.

ARL-TR-2457

April 2001

Approved for public release; distribution is unlimited.

20010427 105

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

# Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5069

---

ARL-TR-2457

April 2001

---

## Non-Polluting Composites Repair and Remanufacturing for Military Applications: Induction-Based Processing

Bruce K. Fink, Nicholas B. Shevchenko, and James M. Sands  
Weapons and Materials Research Directorate, ARL

Shridhar Yarlagadda and John W. Gillespie, Jr.  
University of Delaware

---

## Abstract

---

The development of induction-based processing of carbon-fiber (CF) thermoplastic-matrix composites and accelerated cure of thermosetting adhesives has the potential to provide nonautoclave processing technology for manufacturing and repair of polymer-matrix composites (PMCs). In this report, the results of recent tests demonstrating bonding of composites using commercial off-the-shelf thermal-cure adhesives that are heat cured via an induction field using an inductive susceptor are discussed. This method of cure utilizes heat generation within metal screen-based susceptors to cure the adhesive matrix via a heat transfer mechanism. The mechanical performance of these bonds is presented in comparison with autoclave and thermally cured baselines. No substantial loss of mechanical lap-shear strength is observed in adhesive bonds processed by induction. In addition, an example of induction welding of a thermoplastic-impregnated carbon fiber (AS4) is presented. In order to successfully demonstrate induction welding for manufacture of CF composites, the degradation of the polymer in the laminates is also investigated. No measurable degradation of the polymer, either by dielectric or thermal breakdown when heated by induction, was observed.

---

## Acknowledgments

---

This research was supported in part by the U.S. Department of Defense through the Strategic Environmental Research and Development Program (SERDP) under contract to the U.S. Army Research Laboratory (ARL) under the Non-Polluting Composites Repair and Remanufacturing for Military Applications program.

INTENTIONALLY LEFT BLANK.

---

## Contents

---

Acknowledgments	iii
List of Figures	vii
List of Tables	ix
1. Introduction	1
2. Induction-Based Repair and Remanufacturing	1
2.1 Induction-Based Repair of Multifunctional Composite Armor.....	2
2.1.1 Material Systems .....	3
2.1.2 Induction Bonding Setup .....	4
2.1.3 Mechanical Performance .....	7
2.1.4 Conclusions to Induction-Based Adhesive Bonding.....	9
2.2 Induction-Based Remanufacture of Thermoplastic Composite Laminates .....	9
2.2.1 Heating Mechanisms for Carbon/Thermoplastics.....	10
2.2.1.1 Theoretical Heating Model.....	11
2.2.1.2 Joule Heating of Carbon Fibers [15, 16] .....	13
2.2.1.3 Dielectric Hysteresis Heating at Fiber Junctions .....	13
2.2.1.4 Heat Generated by Fiber Contact Resistance.....	14
2.2.1.5 Material Properties .....	15
2.2.1.6 Two-Ply Heating Model.....	15
2.2.1.7 Two-Ply Model Results .....	16
2.2.1.8 Through-Thickness Heating.....	18
2.2.2 Degradation Studies.....	19
2.2.2.1 Thermal Degradation Study .....	20
2.2.2.2 Weight Loss Measurements.....	20
2.2.2.3 Molecular Weight Characterization .....	21
2.2.2.4 Electrical Degradation Study.....	23
2.2.2.5 Mechanical Performance.....	24
2.2.3 Induction Coil Design.....	25

2.2.3.1	Laminator Coil Design .....	25
2.2.4	Conclusions to Induction-Based Thermoplastic Composite Lamination .....	25
3.	References .....	27
	Distribution List .....	29
	Report Documentation Page .....	47

---

## List of Figures

---

Figure 1. Multifunctional composite armor.....	3
Figure 2. Specimen configuration during induction bonding. ....	4
Figure 3. Induction coil motion direction and configuration.....	5
Figure 4. Typical bondline temperature profile along the coil motion direction. ....	5
Figure 5. Mechanical performance for SW-2214 adhesive system cured at 250 °F. (A-H are defined in Tables 1 and 2).....	8
Figure 6. Mechanical performance for FM300K adhesive system cured at 350 °F. ....	8
Figure 7. Mechanical performance for EC-1386 adhesive system cured at 350 °F. ....	9
Figure 8. Schematic of the induction heating process for carbon/ thermoplastic composites. ....	10
Figure 9. Schematic of induced voltage loops in the composite.....	12
Figure 10. Heating mechanisms in each individual conductive loop.....	12
Figure 11. Circuit model for dielectric heating. ....	14
Figure 12. Circuit model for heating by fiber contact resistance. ....	14
Figure 13. Dielectric properties of PEI (ultem 1000, GE plastics).....	15
Figure 14. Schematic of a 2-ply heating model. ....	16
Figure 15. Comparison of heating patterns for [0/90] 2-ply stack. ....	17
Figure 16. Comparison of heating patterns for [0/45] 2-ply stack. ....	17
Figure 17. Model through-thickness heat generation of an 8-ply carbon- fiber laminate with orientation [0/90/0/-90] <sub>s</sub> . ....	18
Figure 18. Predicted through-thickness temperature profiles at various time steps. ....	19
Figure 19. TGA weight loss profile for PEI resin and prepreg (heating rate = 15 °C/min).....	21
Figure 20. Breakdown voltage measurements for neat PEI films.....	24
Figure 21. Process schematic of lamination stage in a production line. ....	26
Figure 22. Schematic of rectangular coil for lamination stage. ....	26
Figure 23. Temperature profiles of 8-ply stack with rectangular coil.....	26

INTENTIONALLY LEFT BLANK.

---

## List of Tables

---

Table 1. Baselines for comparison with induction bonding .....	6
Table 2. Test cases for induction bonding.....	7
Table 3. Experimental data of neat ultem 1000 resin under various heat treatments. ....	22
Table 4. Degradation study of PEI and AS4/PEI prepreg using GPC.....	23
Table 5. Comparison of mechanical properties.....	25

INTENTIONALLY LEFT BLANK.

---

## 1. Introduction

---

The U.S. Army is currently pursuing the development of low-cost nonautoclave manufacturing technologies for polymer-matrix composites (PMCs) that will allow the U.S. military and contractors to prepare high-performance composites for armor, munition, and vehicle applications with reduced costs, reduced environmental impact, and increased efficiency. The authors have previously introduced the concept of induction-based processing and the environmental impacts for Army applications [1]. The initial repair demonstrations involved heat generation using a metallic (electrically conductive) mesh to translate electromagnetic energy into thermal energy at an adhesive bond line. In this report, the background and physics of induction processing in carbon-fiber thermoplastic laminates is reviewed and the successful development of induction heating that allows suitable repair of many composite structures is discussed. Specifically, the adhesive bonding using susceptor-based induction heating, susceptorless induction-based carbon-fiber laminate consolidation, and development of process models for electromagnetic heating of carbon-fiber composites, including heat generation by carbon fibers, metal-mesh susceptors, and magnetoresistive particles is discussed.

---

## 2. Induction-Based Repair and Remanufacturing

---

The search for cost-effective environmentally friendly manufacturing methods has led to the study of induction heating for bonding and processing of composites [1]. Electromagnetic cure methods involve using induction or electrical resistance heating focused directly at the material to be cured. Induction heating occurs when a current-carrying body, or coil, is placed near another conductor, the susceptor material. The magnetic field caused by the current in the coil induces a current in the susceptor. This induced current causes the susceptor to heat due to Joule heating, and, in the case of a ferromagnetic material, due to hysteresis losses. Carbon-fiber reinforcement in composite materials can function as the susceptor. For other material systems, the susceptor is a metallic mesh or magnetic particles. Energy can be introduced into the precise region to be cured both in the plane of the structure and at the specific depth required [2].

The ability of induction heating to rapidly process carbon-fiber-based thermoplastic composites is a significant environmental asset. Assuming that the

thermoplastic composite meets the performance and quality requirements of an equivalent thermoset counterpart, one can replace the limited shelf-life thermoset with the unlimited shelf-life thermoplastic. This completely eliminates hazardous raw material wastes at the production level resulting from shelf-life expiration and raw-material overages associated with thermoset-based composites production.

Other advantages of induction include reduction of volatile organic compounds (VOCs) and nitrous oxide ( $\text{NO}_x$ ) emissions by processing out of the autoclave, localizing processing controls for repair and remanufacturing, and eliminating processing steps. In addition, induction offers internal noncontact heating; the possibility of a moving heat source (the coil) to heat large areas; high efficiency; control of the heat generation by coil design or by susceptor design; and powerful, portable, and easy-to-operate units [3, 4].

## **2.1 Induction-Based Repair of Multifunctional Composite Armor**

This research is motivated by the expanding use of multifunctional hybrid materials in military ground vehicles and the increasing need for field-expedient and depot-level repair procedures for these thick-section components.

The critical issue in adhesive-based repair of composites is the application of sufficient heat and pressure at the bond line. It is highly desirable that thermal generation be localized at the bond line and be evenly distributed (taking into account thermal conductive losses). This is especially important with the increasing use of multifunctional hybrid composites, such as composite armor. These composites typically have several layers, each serving a different function, as shown in Figure 1. Repair of such a thick-section composite will require heating locally at the appropriate bond lines; one such method is induction heating [5, 6]. In addition, due to the noncontact nature of induction heating, it may be possible to bond several layers at the same time, which reduces hazardous waste, energy consumption, and repair times for the part. Conventional repair techniques (e.g., heat blankets) will require bonding of one layer at a time, resulting in multiple potential hazardous waste streams such as trim, consumables, and VOC emissions.

While the induction-based repair procedure has the potential to reduce hazardous waste, it is essential that the repaired part meet the performance requirements dictated by the application. Hence, the initial work done under the program focuses on evaluating the performance of induction-based repair procedures. The goal is to obtain performance similar to that achieved with conventional repair procedures.

Recent studies [1, 7, 8] have shown similar properties for induction-heated adhesive bonds compared to baselines for room-temperature adhesives. Electrically conductive mesh susceptors and epoxy-based adhesives were used.

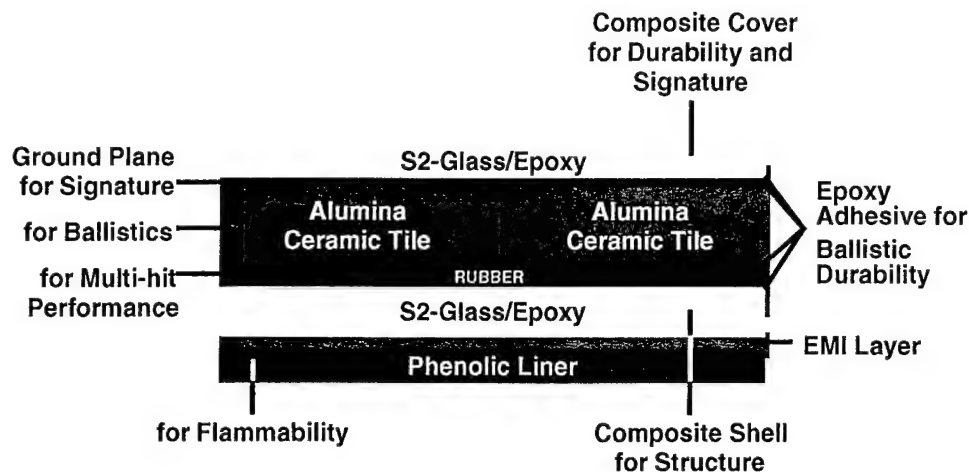


Figure 1. Multifunctional composite armor.

A methodology that enables cure cycles to be related to degree-of-cure predictions for accelerated curing of adhesives was established.

The present work extends this effort to high-temperature-curing adhesive systems because most military applications require high-performance adhesives, which typically are high-temperature-curing systems (250 °F and 350 °F thermosetting adhesives). A carbon/epoxy substrate system was used to study susceptorless induction bonding and assess the effect of the mesh or eddy-current susceptor on bond strengths. A glass/vinyl-ester substrate was also used for bond strength tests, due to the increasing use of such systems in military vehicles. The glass/vinyl-ester composite was fabricated by vacuum-assisted resin-transfer molding (VARTM), which utilizes fiber preforms and resin systems and has no shelf-life requirements.

### 2.1.1 Material Systems

Three adhesive systems were considered in this study: SW-2214 and EC-1386 from 3M, and FM300K film adhesive from American Cyanamid. Recommended cure cycles are 60 min at 250 °F (SW-2214) and 60 min at 350 °F (EC-1386 and FM300K). Recommended pressures during the cure are approximately 25 psi for SW-2214 and EC-1386, and 40 psi for FM300K.

Two composite systems were chosen for this study: HG-Cycom 919GF carbon/epoxy prepreg, and E-glass/vinyl ester fabricated via VARTM. Carbon/epoxy panels consisting of 16 plies were laid-up and cured in the autoclave based on the manufacturer's recommendations. The thickness of the cured panel was approximately 4.0 mm. The glass/vinyl ester was fabricated by VARTM at room temperature and post-cured at 250 °F for 1 hr to ensure complete cure of the resin system.

The susceptor material used in this study was a stainless steel mesh with a density of  $30 \times 30$  boxes per square inch and a wire diameter of 0.0075 in. The mesh density and wire diameter were chosen based on prior testing and experience [7-10]

### 2.1.2 Induction Bonding Setup

The initial effort demonstrated the ability to bond one lap-shear specimen at a time, as compared to American Society for Testing of Materials (ASTM) Standard D1002 [11] methodology which calls for bonding of two laminates and subsequent machining to lap-shear test specimen dimensions. In this effort, the U.S. Army Research Laboratory (ARL) Strategic Environmental Research and Development (SERDP) program induction setup [1] was modified by mounting the induction coil on a robotic head. This allowed for three-dimensional (3-D) programmed coil motion, at a specified velocity resulting in the bonding of two composite panels at a time rather than a single lap-shear specimen. The substrate was cut into pairs of panels 7 in  $\times$  4.5 in. The bonded panels were subsequently machined to six lap-shear specimens. Figure 2 shows the specimen configuration during induction bonding.

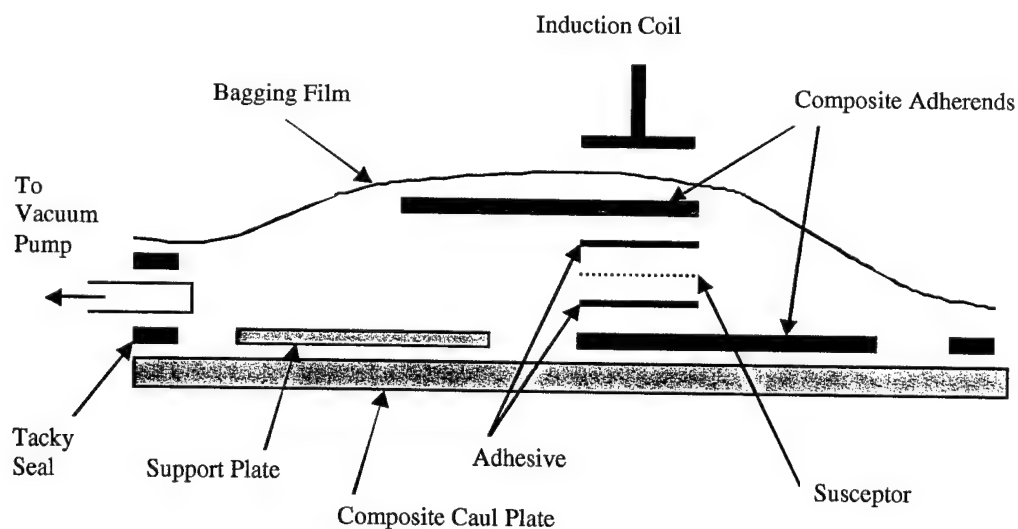


Figure 2. Specimen configuration during induction bonding.

Figure 3 shows the coil motion direction on the bagged specimen. The motion pattern was programmed into the robot. The velocity of the robot head was a variable that could be adjusted to achieve thermal uniformity along the motion path. For this effort, a velocity of 10 mm/s was chosen after initial trials on thermal uniformity. Figure 4 shows a typical infrared (IR) temperature profile

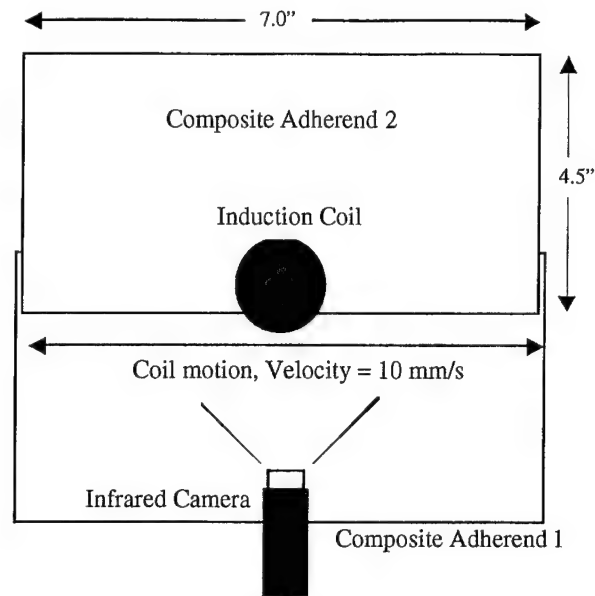


Figure 3. Induction coil motion direction and configuration.

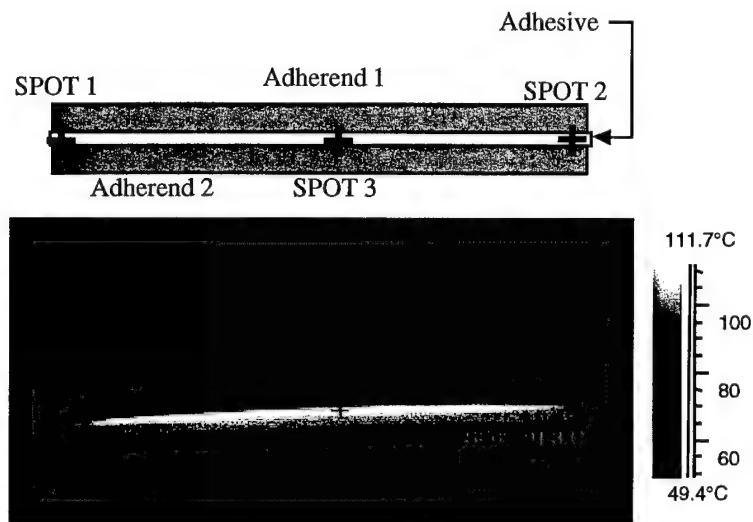


Figure 4. Typical bondline temperature profile along the coil motion direction.

along the motion direction of the coil, and differentials of up to  $\pm 10$  °C were noted based on coil location. The temperatures shown are steady-state surface temperatures of the substrates or adherends. Material performance tests with these temperature differentials will help establish process windows for induction bonding. For the carbon/epoxy system, surface temperatures did not differ

significantly from bond line temperatures due to the good thermal conduction of carbon fibers; this was confirmed by thermocouple measurements. For glass/vinyl ester, differentials of up to  $\pm 10$  °C between the bond line and surface were noted. Further refinements to determine the ideal motion velocity and pattern for minimal temperature gradients are in progress.

For a carbon/epoxy substrate or adherend, no susceptor is necessary. However, bonding tests were performed for both cases (i.e., with and without the mesh susceptor) to assess the presence of the mesh on bond strengths. For the carbon/epoxy substrate, all three adhesive systems were induction bonded, with and without the mesh. For the glass/vinyl-ester system, the SW-2214 adhesive was induction bonded with the mesh, as the cure cycle of the other systems (350 °F) could cause degradation in the substrate. All the induction-bonded specimens were fabricated under vacuum pressure. Table 1 lists the baselines; Table 2 lists the test cases.

Table 1. Baselines for comparison with induction bonding.

Case	Substrate	Number of Specimens	Adhesive	Cure Cycle
A B	Carbon/Epoxy	6	SW-2214 SW-2214 + mesh <sup>a</sup>	250 °F, Vacuum 60 min
A B	Carbon/Epoxy	6	EC-1386 EC-1386 + mesh	350 °F, Vacuum 60 min
A B	Carbon/Epoxy	6	FM300K FM300K + mesh	350 °F, Vacuum 60 min
E F			FM300K FM300K + mesh	350 °F, 40 psi 60 min
G	Glass/Vinyl Ester	6	SW-2214 SW-2214 + mesh	250 °F, Vacuum 60 min

<sup>a</sup> Mesh = SS304, 30 × 30, 0.0075-in wire.

Baseline lap-shear specimens were fabricated according to the manufacturer's recommended cure cycles. For the FM300K adhesive system, two pressures were considered: vacuum (~15 psi) and 40 psi. For all other autoclave specimens, vacuum pressure was used. This allows for direct comparison with induction-bonded lap-shear tests, which were performed under vacuum pressure.

Test cases of single lap-shear (SLS) specimens were fabricated as described in Table 2. The adhesive bond-line thicknesses for the specimens were measured by means of a traveling microscope. In all cases where no susceptor or mesh was

Table 2. Test cases for induction bonding.

Case	Substrate	Number of Specimens	Adhesive	Cure Cycle
C D	Carbon/Epoxy	6	SW-2214 SW-2214 + mesh <sup>a</sup>	250 °F, Vacuum 60 min
C D	Carbon/Epoxy	6	EC-1386 EC-1386 + mesh	350 °F, Vacuum 60 min
C D	Carbon/Epoxy	6	FM300K FM300K + mesh	350 °F, Vacuum 60 min
H	Glass/Vinyl Ester	6	SW-2214 + mesh	250 °F, Vacuum 60 min

<sup>a</sup> Mesh = SS304, 30 × 30, 0.0075-in wire.

used, the thickness of the bond line was consistently about 0.002 in. The mesh caused an increase in bond-line thickness to about 0.013 in. These values were very consistent and did not appear to vary greatly between specimens. The effect of bond line thickness variation was not considered in the analysis, although it is recognized that this variable may be significant.

### 2.1.3 Mechanical Performance

All SLS specimens were tested to failure in an Instron universal testing machine. The mean nominal shear strengths and the associated error bars are shown in Figures 5, 6, and 7 for SW-2214, FM300K, and EC-1386, respectively. Six specimens were tested for each case, and in all cases cohesive failure of the adhesive layer was obtained. Degree of cure for each case was determined by differential scanning calorimetry (DSC) and was greater than 95% for all observed specimens.

In general, for all the adhesive systems, no loss in mechanical performance is noted, between induction-cured and autoclave baseline specimens. In some cases (Figures 5 and 7), the induction-cured specimens exhibit higher mean shear strengths, which may reflect the thinner bond line. The same trend is observed for the glass/vinyl-ester system (cases G and H in Figure 5). It is also interesting to note the relatively similar scatter in strength data between the induction-cured specimens and the autoclaved baselines, despite the temperature differentials during induction cure. For the FM300K film adhesive system, higher pressure during the cure cycle (40 psi) causes a significant increase in the bond strength but not in the presence of a mesh. However, the presence of the mesh does not seem to affect performance in vacuum-processed specimens. For the EC-1386 and SW-2214 paste adhesives, the mesh causes a significant drop in strength.

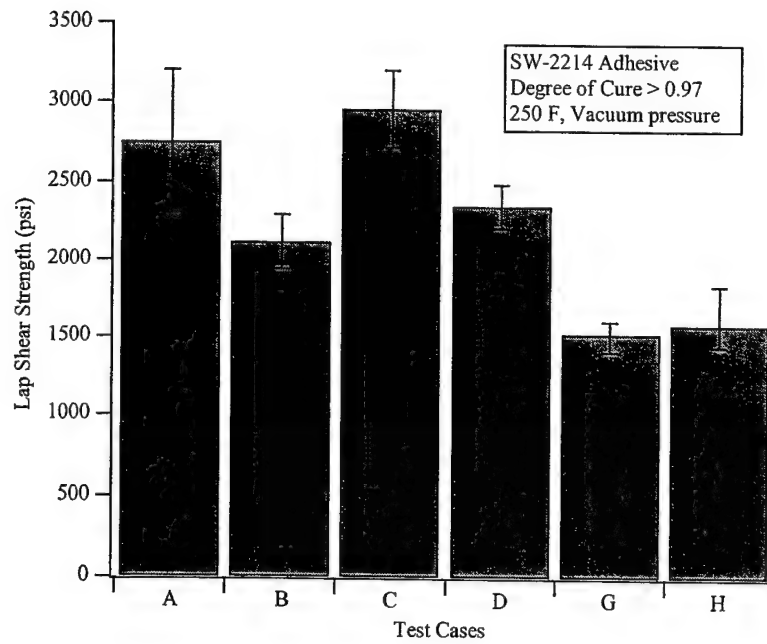


Figure 5. Mechanical performance for SW-2214 adhesive system cured at 250 °F. (A-H are defined in Tables 1 and 2).

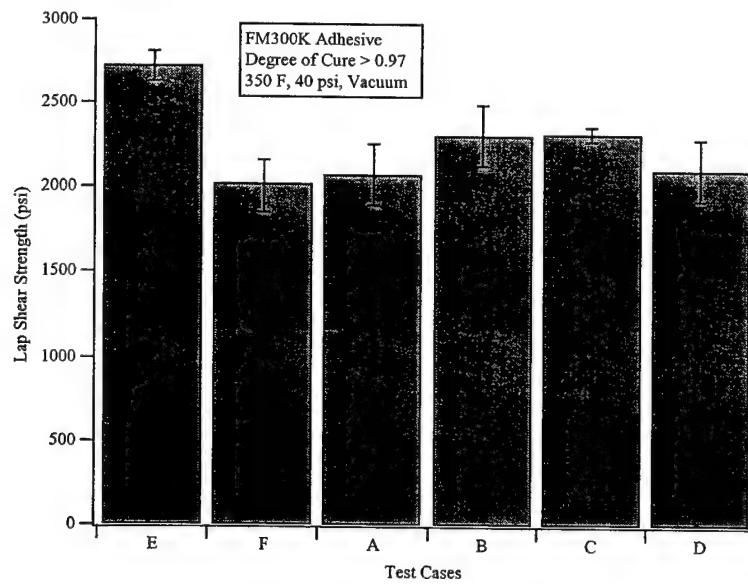


Figure 6. Mechanical performance for FM300K adhesive system cured at 350 °F.

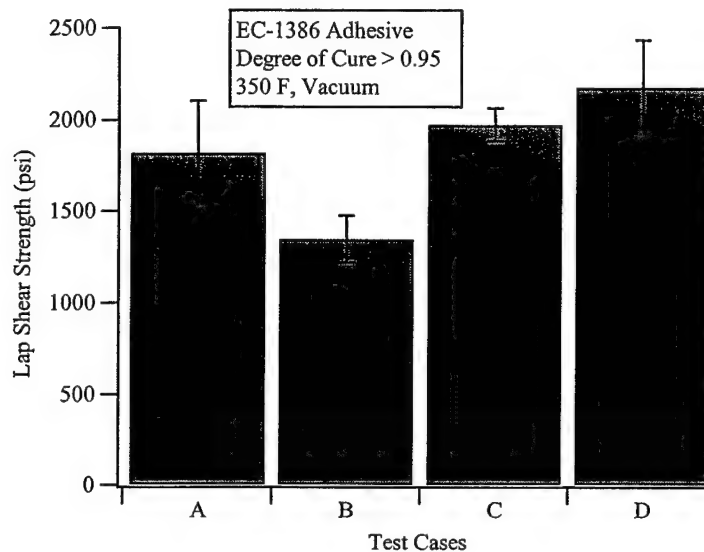


Figure 7. Mechanical performance for EC-1386 adhesive system cured at 350 °F.

#### 2.1.4 Conclusions to Induction-Based Adhesive Bonding

Following the methodology established in the previous work [9] on thermoset adhesive cure, performance studies of high-temperature curing adhesive systems, due to induction cure, have shown no loss in bond strengths between baselines and induction processing. This study, along with the previous effort [9], validates induction cure as an alternative method for processing thermally curable adhesives while retaining baseline bond strengths. Advantages of induction cure stem from reduction of VOCs and NO<sub>x</sub> emissions by processing out of the autoclave and an increased cure rate due to through-thickness heating. It also provides a unique ability to perform multimaterial repairs (as in composite armor) in a single step, thus eliminating process steps and corresponding hazardous waste.

#### 2.2 Induction-Based Remanufacture of Thermoplastic Composite Laminates

The Department of Defense (DOD) has increased use of carbon-fiber-reinforced thermoset prepreps, resulting in a potentially significant hazardous waste stream due to shelf-life expiration and VOC emissions during processing [1]. It is estimated that the raw material requirements (i.e., prepreg) for one particular application will exceed one million pounds annually when that weapon system goes into full-scale production, and the potential waste is estimated at 20% of the total [1]. This problem can be avoided by the replacement of thermoset-based carbon-fiber composite laminates with carbon-fiber-reinforced thermoplastic

prepregs, due to their infinite shelf life. In addition, VOC emissions during thermoplastic processing are insignificant compared to thermosets [1].

However, a major barrier to the use of thermoplastics is their ability to meet both performance and throughput requirements (100+/day). Induction processing of carbon-fiber thermoplastics offers a potential solution to this problem by enabling rapid volumetric heating of the thermoplastic prior to consolidation as described in the previous report [1]. This technology will enable reduction in cycle times, while maintaining quality, compared to conventional compression molding processes.

The key thermal requirement of induction processing for lamination applications is rapid, uniform heating of the composite for maximum throughput and quality. This requires an understanding of the heating mechanisms during induction processing, followed by optimization of the critical process parameters. It is also essential to determine possible degradation mechanisms and process windows due to the rapid heating requirement.

### 2.2.1 Heating Mechanisms for Carbon/Thermoplastics

Induction heating for carbon-fiber-reinforced thermoplastic composites is based on the fact that eddy-current flows along conductive paths within the composite subjected to an alternating magnetic field generated by the induction coil (Figure 8). The frequency and the intensity of the magnetic field penetrating the composite as well as the loop area of the conductive path determine the electromotive force (emf) or induced voltages, which, in turn, govern the heating of the composite.

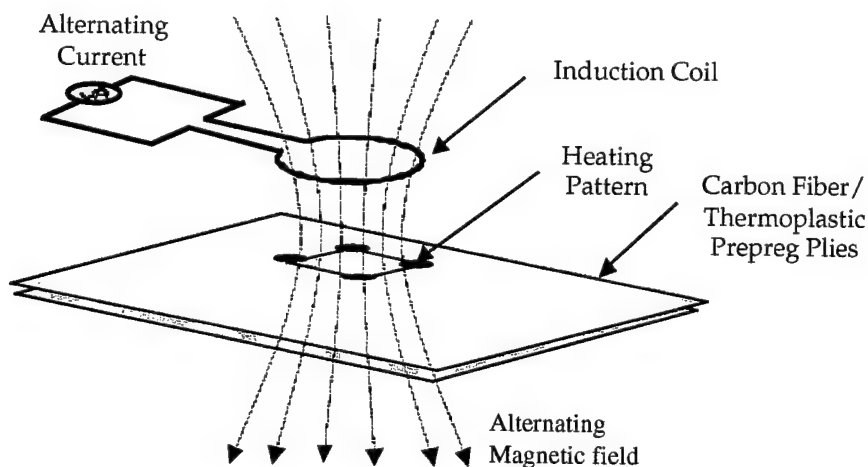


Figure 8. Schematic of the induction heating process for carbon/thermoplastic composites.

The primary objective of this study is to investigate the heating mechanisms of carbon/thermoplastics and then determine the relationship between the induction coil and material parameters and heating. Once this relationship is determined, it will be possible to perform parametric studies using the major process variables in order to optimize and meet the thermal requirements for the potential production of thermoplastic-based composite structures.

#### 2.2.1.1 Theoretical Heating Model

Alternating magnetic field lines intersecting the laminate induce emf's within each conductive loop are governed by Faraday's Law of Induction [12]. Loops are formed between adjacent plies through the junctions, where fibers overlap each other. As a result, the induced current flows along the carbon fibers and either through the polymeric region or by direct contact of fibers, into its adjacent ply, as shown in Figure 9. Generally the emf induced in a circuit is directly proportional to the time rate of change of magnetic flux through the circuit and is calculated from

$$emf = \omega AB_0 = 2\pi f A B_0, \quad (1)$$

where  $B_0$  is the maximum value of the magnetic field normal to the area of the conductive loop,  $A$  is the area of the conductive loop, and  $f$  is the time rate of change of magnetic flux.

Once the emf values for all conductive loops in the calculation domain are obtained, Kirchoff's voltage and current conservation laws are applied to the network of conductive loops. Kirchoff's voltage law (KVL) [12] requires that the algebraic sum of all voltages around the loop should be zero while Kirchoff's current law (KCL) means that current is conserved at each node. In mathematical terms, they can be expressed as follows:

$$\begin{aligned} \sum \text{Voltage Drop} &= \text{Induced emf} && ; \text{Kirchoff's Voltage Law} \\ \sum (\text{Incoming Current} - \text{Outgoing Current}) &= 0 && ; \text{Kirchoff's Current Law} \end{aligned} \quad (2)$$

Three heating mechanisms are possible within the composite:

- Joule heating due to the inherent electrical resistivity of the carbon fibers.
- Dielectric heating of the polymer at the fiber junctions.
- Contact resistance at the fiber junctions.

In general, prepregs have nonuniform surface roughnesses, which makes it difficult to determine which mechanism is dominant at a certain region in the interface between plies. In addition, it is not easy to estimate the electrical contact resistance between carbon fibers of adjacent plies. The heating mechanisms are shown schematically in Figure 10 and described in detail hereafter.

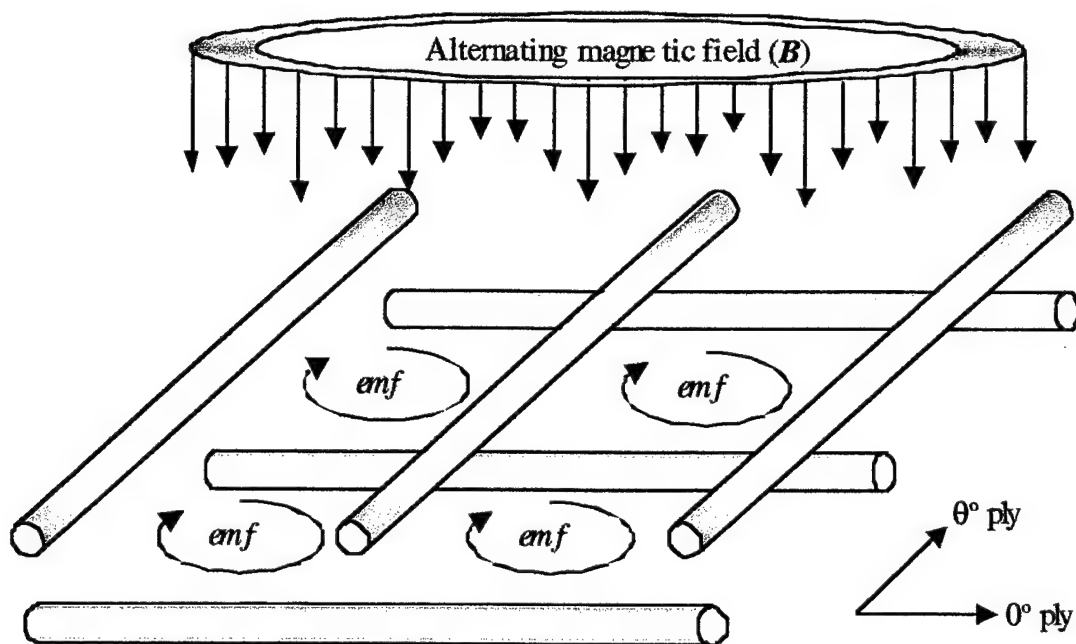


Figure 9. Schematic of induced voltage loops in the composite.

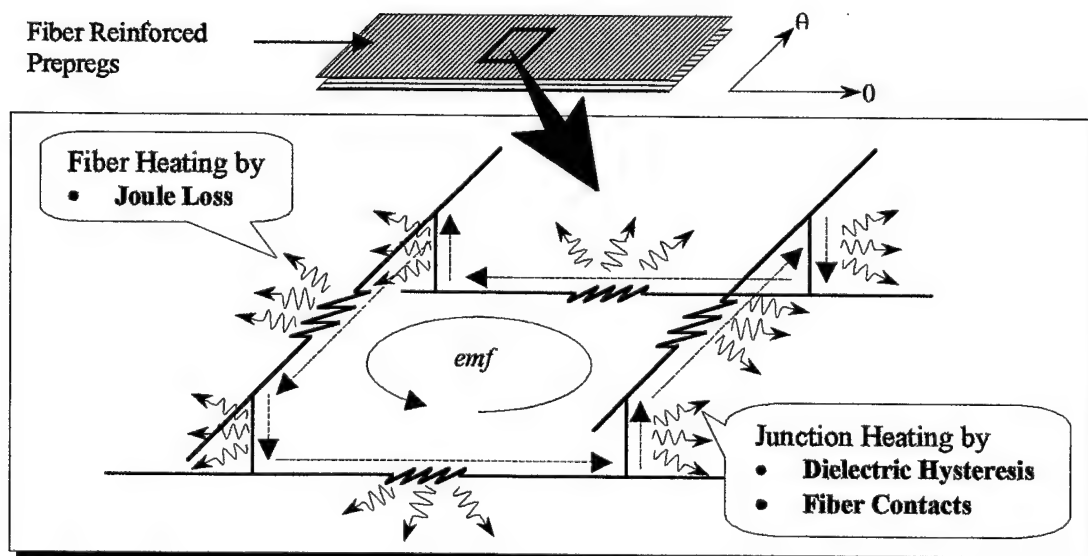


Figure 10. Heating mechanisms in each individual conductive loop.

### 2.2.1.2 Joule Heating of Carbon Fibers [15, 16]

Previous authors [13–16] have compared joule heating in the fiber and dielectric heating in the matrix and shown that dielectric heating is the dominant mechanism. The current effort includes the contact resistance mechanism and performs a parametric study of all three mechanisms for the process variables defined for thermoplastic laminates. Successful modeling will identify the key heating mechanism and optimize induction-based processing parameters to meet quality and performance requirements. This will enable transition from thermosets to thermoplastics, thus eliminating potentially large hazardous waste stream due to shelf-life expiration.

Each carbon fiber is treated as a resistor and the heat generated is calculated from

$$P_{fiber} = I_{fiber}^2 R_{fiber}, \quad (3)$$

where  $I_{fiber}$  is the induced current flowing in the fiber and  $R_{fiber}$  is the resistance of the fiber, which can be expressed as

$$R_{fiber} = \rho_{fiber} \frac{l_x}{A_{fiber}} \quad \text{or} \quad \rho_{fiber} \frac{l_y}{A_{fiber}}, \quad (4)$$

where  $A_{fiber}$  is the cross-sectional area of the fiber and  $l_x$  and  $l_y$  are the spacing distances between fiber intersections in the  $x$  and  $y$  directions, respectively. Note that  $l_x$  and  $l_y$  vary according to the mesh size as shown in Figure 10.

### 2.2.1.3 Dielectric Hysteresis Heating at Fiber Junctions [13, 14].

If the distance between the fibers at the junction is enough to form a capacitor, dielectric heating takes place, since the molecular dipoles in the matrix cannot rotate with the same frequency of the induced voltages in the fibers. The dissipation factor ( $\tan \delta$ ), which is one of the electrical properties of the matrix, determines how much heat will be dissipated. The impedance of the capacitor is  $1/(\omega C \tan \delta)$ , where  $\omega$  is the angular frequency of the alternating current and  $C$  is the capacitance of the material. Considering the configuration of the fiber junction shown in Figure 11, the capacitance of the dielectric material can be expressed as follows:

$$C = \kappa \epsilon_0 \frac{A_p}{h} \quad (6)$$

where  $\kappa$  is the relative dielectric constant of the material and  $\epsilon_0$  is the permittivity of vacuum ( $8.85 \times 10^{-12}$  f/m).  $A_p$  and  $h$  are the projection area and distance between the fibers at the junction, respectively. Therefore, the impedance of the capacitor ( $Z_C$ ) can be written as

$$Z_C = \frac{h}{\omega \kappa \epsilon_0 (\tan \delta) A_p}. \quad (7)$$

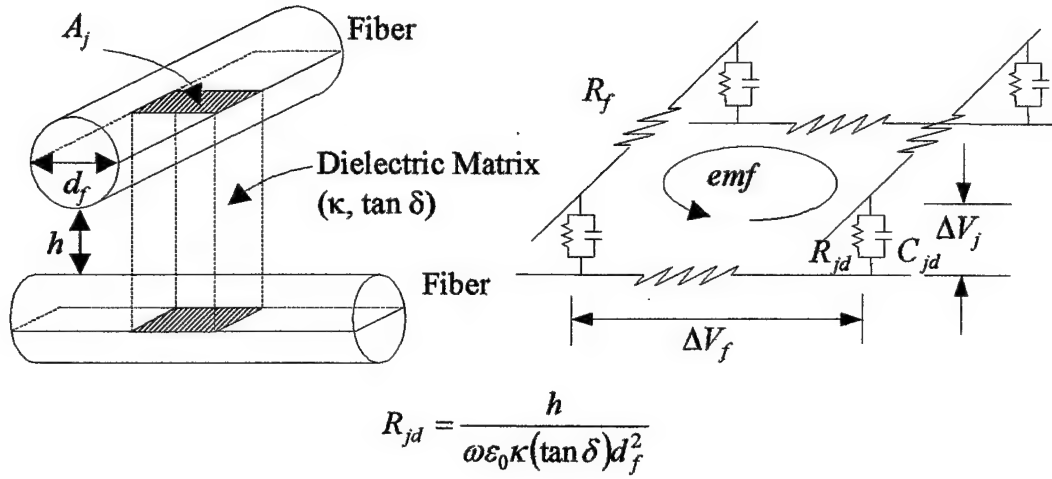


Figure 11. Circuit model for dielectric heating.

The heating generated by the capacitor is as follows:

$$P_{junction} = \frac{(V_{junction})^2}{Z_C} = \frac{\omega \kappa \epsilon_0 (\tan \delta) A_p (V_{junction})^2}{h} \quad (8)$$

#### 2.2.1.4 Heat Generated by Fiber Contact Resistance

If the fibers at the junction are in contact or the distance between fibers is very short, heating can occur at the contact region due to contact resistance between the fibers. However, as mentioned previously, it is hard to quantify the contact resistance, as it is a function of surface roughness of prepreg and the laminate processing parameters. A simple resistor can model the fiber contact and the heating mechanism (Figure 12), and through parametric studies and experiments, the contact resistance is estimated.

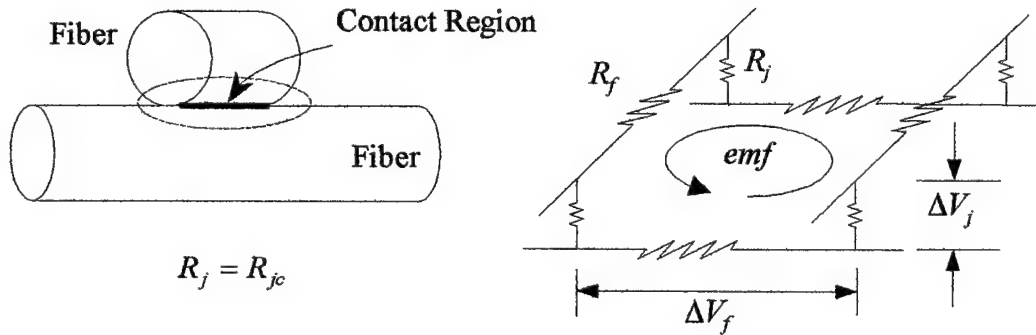


Figure 12. Circuit model for heating by fiber contact resistance.

### 2.2.1.5 Material Properties

In this study, AS4 carbon fiber and polyetherimide (PEI) thermoplastic prepreg was selected as the test matrix because it serves as a model system for proposed military munitions manufacture and provides high-process temperature limits. The diameter of the carbon fiber was 8  $\mu\text{m}$ , and the electrical resistivity was 15.3  $\mu\Omega\text{m}$ . The dielectric constant ( $\kappa$ ) and dissipation factor ( $\tan \delta$ ) for the PEI were measured by experimental studies. The experimental results show that the dielectric constant and dissipation factor can be assumed to be constant for frequencies up to 4 MHz as shown in Figure 13.

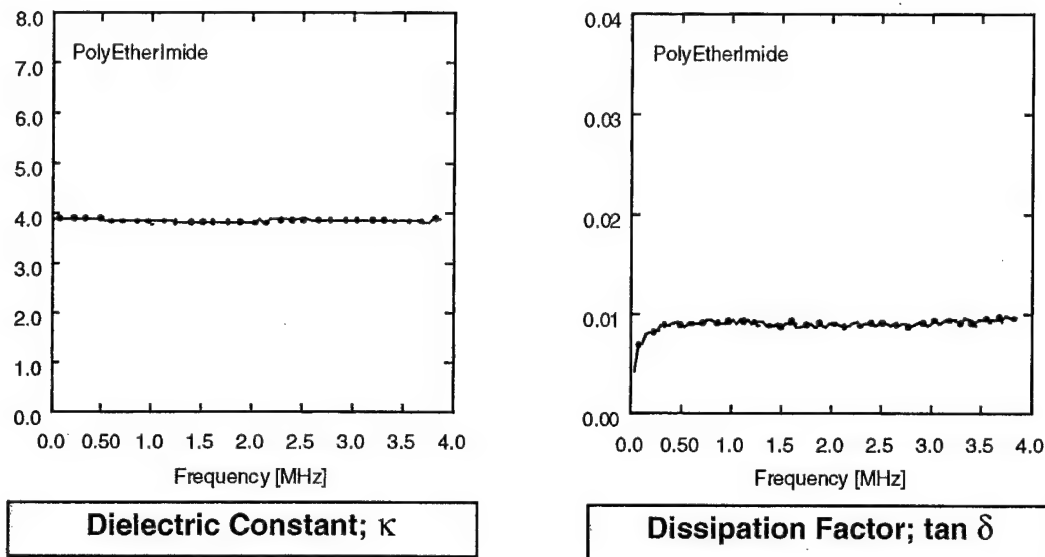


Figure 13. Dielectric properties of PEI (ultem 1000, GE plastics).

### 2.2.1.6 Two-Ply Heating Model

Initial models focused on addressing the heating behavior of 2-ply prepreg stacks. This allows for a perform of a detailed parametric study, followed by experimental verification to assess the model's capabilities. A schematic describing the model procedure is shown in Figure 14.

Since carbon/thermoplastic prepreps, such as AS4/PEI or AS4/polyetheretherketone (PEEK), have approximately 20 fibers per 5-mil (127- $\mu\text{m}$ ) width, it can be estimated that about 790,000 fibers exist in a 1-m wide prepreg. Therefore, cross-ply or angle-ply prepreps are simplified by a conductive loop network using a finite number of fiber grids with an assumption that fibers and junctions within each conductive loop have the same resistance and current values. It is expected that this type of meshing will generate good qualitative results, and if the mesh becomes denser, more precise results, in the quantitative sense can be expected.

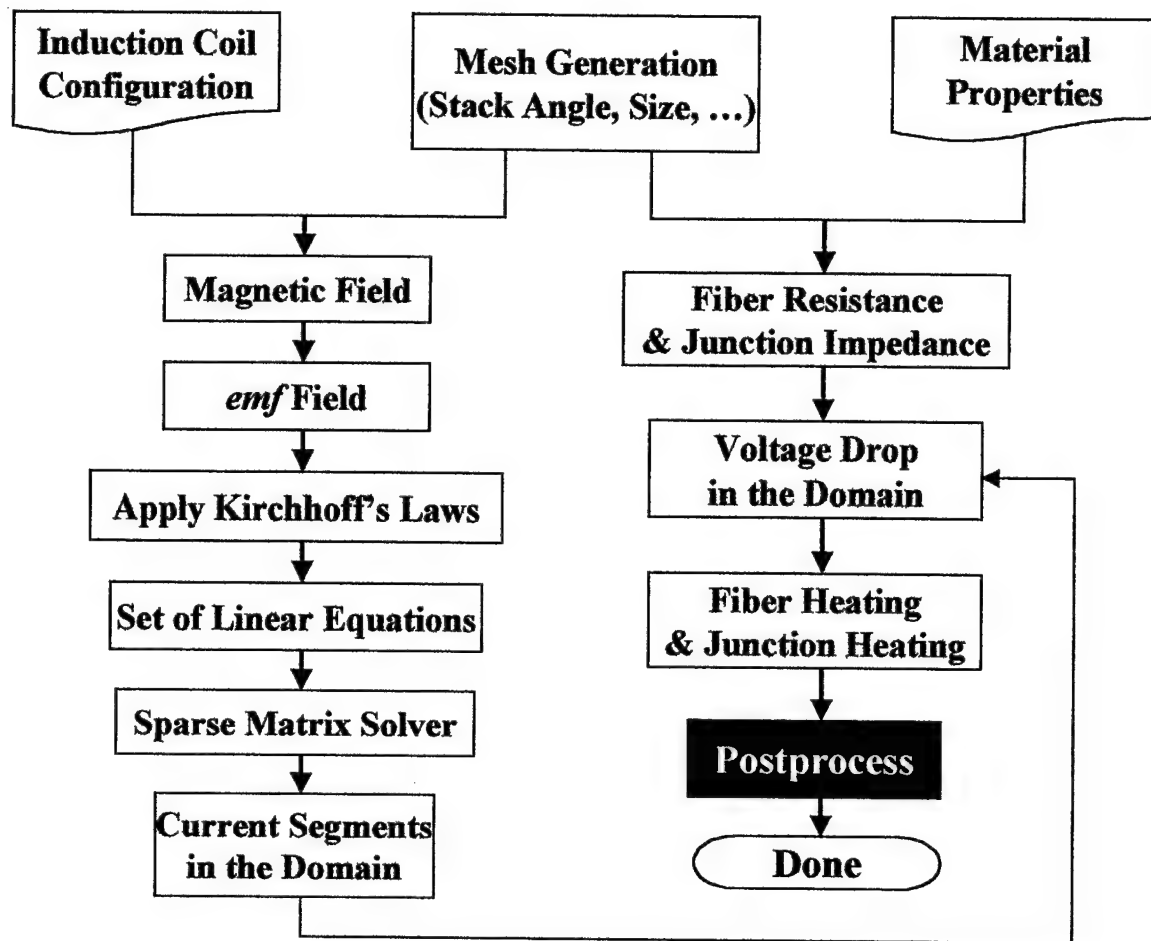


Figure 14. Schematic of a 2-ply heating model.

The process variables used in the model are: (1) coil type (pancake, conical, paper clip, and solenoid), (2) coil size (outer dimension, inner dimension, (3) number of turns, (4) spacing between turns), (5) distance between induction coil and composite, (6) frequency of the current in the induction coil, and (7) size and geometry of the composite.

Variables in the numerical model for parametric studies are mesh size and density, fiber-fiber distance at the interface of two plies, and fiber-fiber contact resistance or equivalent impedance for fiber junction.


#### 2.2.1.7 Two-Ply Model Results

Initial experiments focused on evaluating numerical predictions qualitatively. This was done by heating 2-ply stacks at various angles— $[0/90]$ ,  $[0/\theta]$ —under a known magnetic field and comparing measured heating patterns, obtained using a calibrated thermal infrared camera, with the 2-ply model predictions. Results

are shown for two select cases: a cross-ply stack [0/90] (Figure 15) and an angle-ply stack [0/45] (Figure 16). Qualitatively, there is excellent correlation between the predicted pattern and the actual measured heating profile.

#### Cross-ply, 12" x 8" Piece

##### Experimental Result

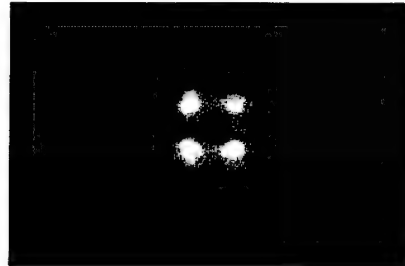

##### Numerical Result

##### (Heating Pattern for Junction)

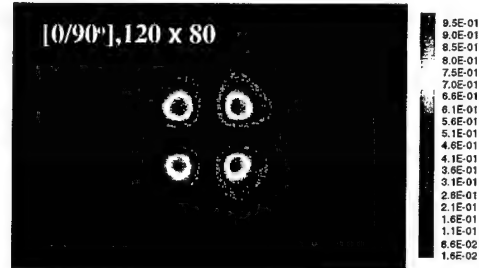


Figure 15. Comparison of heating patterns for [0/90] 2-ply stack.

#### Angle-ply, 12" x 8" Piece

##### Experimental Result



##### Numerical Result

##### (Heating Patterns for Junction)

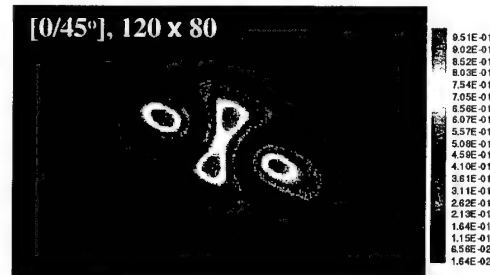


Figure 16. Comparison of heating patterns for [0/45] 2-ply stack.

Predictions in these figures were obtained by parametric studies with the three heating mechanisms (fiber heating, dielectric, and contact resistance) in the 2-ply stack. These studies show that the junction-heating effects are greater than fiber heating by an order of magnitude. In other words, the primary heating in carbon/thermoplastics occurs at the junction and can be dielectric or contact resistance based, depending on the process variables.

Quantitative predictions are not as accurate and difficult to compare, because the model predicts heat generation rather than temperature. Work is continuing to optimize process variables and to extend the 2-ply model to multiply cases.

### 2.2.1.8 Through-Thickness Heating

The 2-ply model has shown that during induction processing, heating occurs predominantly at the junctions between fibers of adjacent plies or along the ply-ply interface. This raises the question of the uniformity of the temperature profile through the thickness of the composite. Figure 17 shows a typical heat-generation profile that can be expected for an 8-ply stack. As seen in the figure, heat generation occurs at the interface between any two plies that do not have the same fiber orientation.


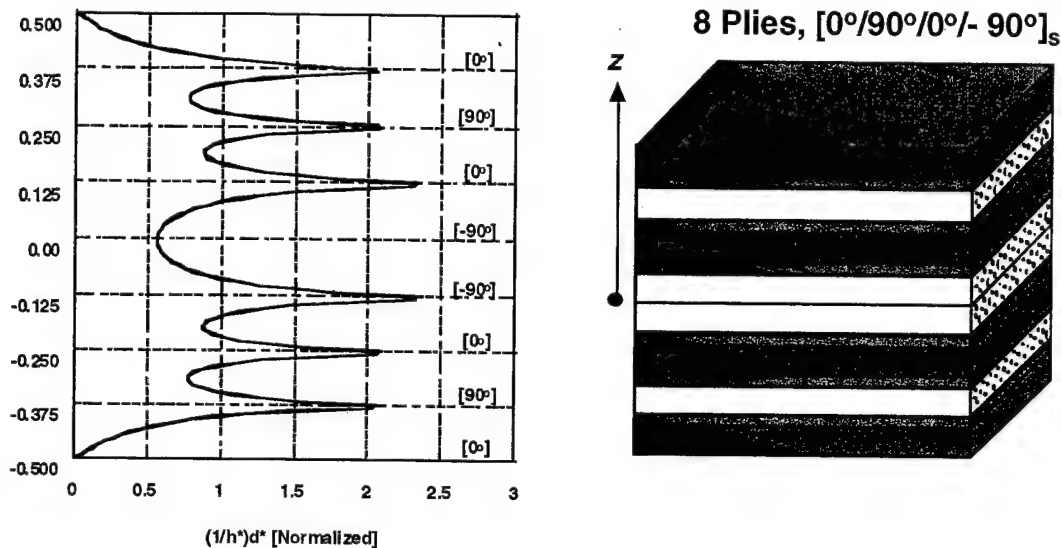



Figure 17. Model through-thickness heat generation of an 8-ply carbon-fiber laminate with orientation  $[0/90/0/-90]_s$ .

Since many structural laminates of interest to DOD are fabricated from 8-ply stacks similar to those shown in Figure 17 (or quasi-isotropic laminates built from such 8-ply stacks), it is necessary to identify not only surface heating profiles but also through-thickness heating profiles for quality and performance. It is essential that the temperature gradient across and through the thickness of the 8-ply stack is small during induction heating or significant performance degradation can result [17].


A one-dimensional (1-D) transient heat transfer model was formulated using a finite difference scheme to predict temperature profiles through the thickness, based on heat generation shown in Figure 17. Predicted temperature profiles are shown in Figure 18, showing transient, as well as steady-state, results. Results show that temperature variations across the thickness of the 8-ply stack are insignificant after 1 s, which is within the range of the process cycle time. This is expected due to the small thickness of each ply and has been borne out by experimental measurements.

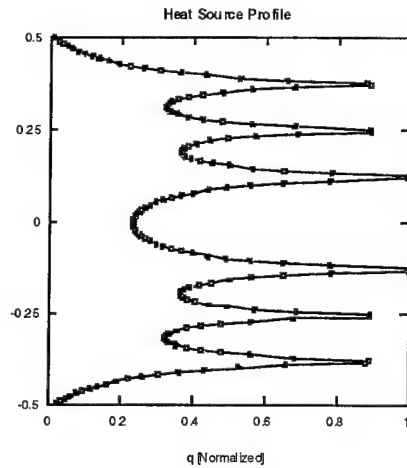


Heat Source

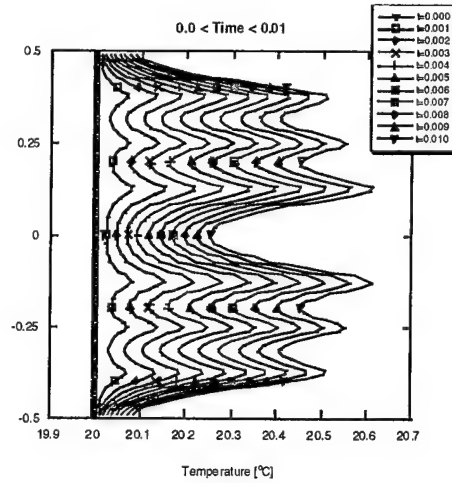

0 s < t < 0.01 s

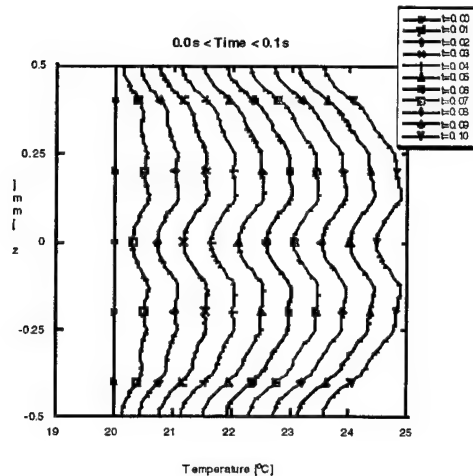

0 s < t < 0.1 s

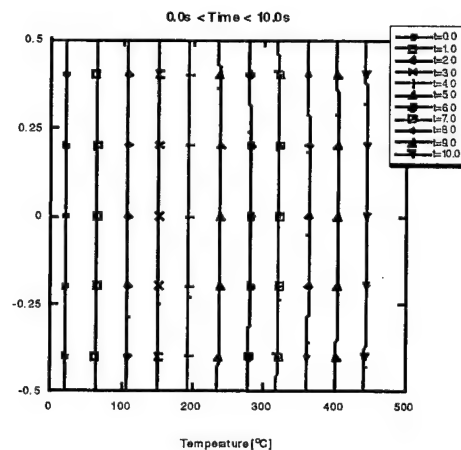

0 s < t < 10 s

Figure 18. Predicted through-thickness temperature profiles at various time steps.

### 2.2.2 Degradation Studies

Electromagnetic induction processing of thermoplastic-based laminates is currently being evaluated and perfected to produce a 10-fold decrease in cycle times for production and a resultant decrease in production costs. This process requires that carbon-fiber-based composites be subjected to large alternating electromagnetic fields. In addition to the issues of degradation of the matrix in induction-based processing, in the EM gun program glass- and carbon-based polymer composite compulsator components experience very large fluctuations in electromagnetic energy during charging and discharging [18]. These systems

are subject to potentially critical polymer degradation as a result of a little-studied phenomenon known as thermoelectric degradation [19]. When polymers degrade through any mechanism, they suffer significant losses in strength, stiffness, and durability.

The focus of this effort is on identifying degradation mechanisms during electromagnetic induction processing and quantifying their effects on performance. There are two possible degradation scenarios associated with induction-based processing of carbon/thermoplastics: thermal degradation, and electrical degradation due to dielectric breakdown in the matrix.

#### 2.2.2.1 Thermal Degradation Study

Weight loss and molecular weight (MW) measurements were used to characterize thermal degradation of both neat resin and prepreg. Thermogravimetric analysis (TGA) was used for weight loss measurements in both air and inert (nitrogen) atmospheres. Gel permeation chromatography (GPC) was used to obtain MW measurements. In addition, dissolution times for resins in a good solvent (methylene chloride) were also measured.

#### 2.2.2.2 Weight Loss Measurements

TGA for both neat PEI and AS4/PEI prepreg indicates no measurable weight loss of the bulk material up to 500 °C, as shown in Figure 19. Isothermal TGA data also shows that no weight loss was observed at 350 °C, for up to 1 hr. Approximately 2% weight loss was observed at 450 °C after 30 min, which indicates significant degradation. Since the normal processing temperature is 330 °C, thermal degradation of the bulk material is expected to be minimal as long as the electromagnetic induction processed material does not exceed the processing window.

Neat PEI samples were exposed to various thermal histories using a TGA chamber, and the glass transition temperature was measured using DMA. Changes in resin color and dissolving time in a good solvent (methylene chloride) were also noted. As shown in Table 3, no significant changes in glass transition temperature were observed. However, the color of the resin changed from yellow to black, and the dissolving time increased significantly when temperature and time increased. Oxygen in the atmosphere also affects the color change and dissolving time in the solvent. In several cases (G≈K), there was some gel left over in the solution, which obviously indicates that crosslinking reactions occurred in the polymer.

The TGA study shows that weight loss alone is not sufficient to identify the degree of degradation of the polymer. The initiation of crosslinking in the polymer is a better measure of the onset of degradation. Crosslinking on a composite surface hinders diffusion of polymer chains during processing of complex parts and may result in poor bonding and performance.

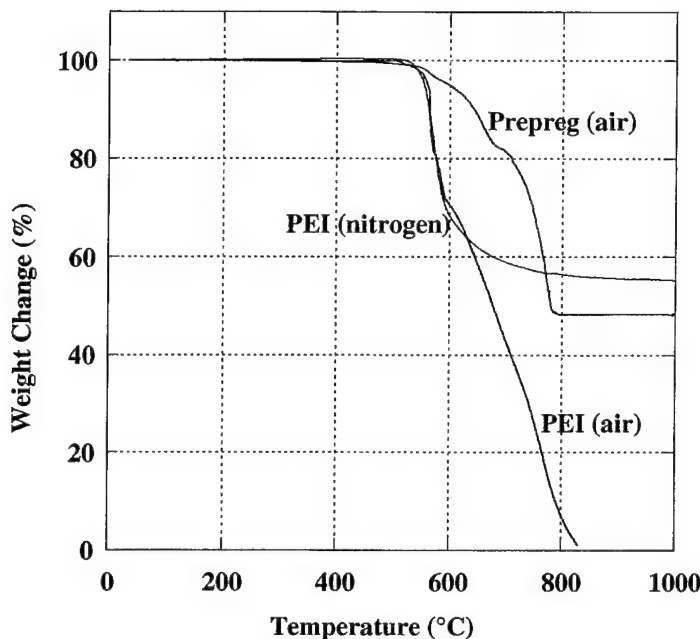


Figure 19. TGA weight loss profile for PEI resin and prepreg (heating rate = 15 °C/min).

#### 2.2.2.3 Molecular Weight Characterization

GPC was used to assess the extent of crosslinking. According to the literature [20] and preliminary experimental observations, crosslinking reaction tends to be dominant over chain scission (breakup of chains) in the early stages of degradation of thermoplastic polymers (PEEK and PEI). Crosslinking reactions typically occur at lower temperatures (~350 °C) than the onset of weight loss observed by TGA (~450 °C). GPC is one of the most frequently used techniques to measure the polymer MW and its distribution (MWD). The MWD curves show the changes caused by crosslinking or chain scission. For example, if crosslinking is dominant over chain scission, there are higher MW chains; as a result, a broader curve will be obtained that has a peak intensity shifted to the left (shorter elution times) compared to a baseline polymer elution. If chain scission is dominant, the curve will be broadened to the right or longer elution times.

Most of the samples evaluated exhibited peak intensity shifts to shorter elution times, which indicates that crosslinking is dominant. All of the curves were recalculated after the intensity values were divided by the peak intensity. The normalized area under the curve can be used as a qualitative measure of the extent of crosslinking. The intensity normalized area increases with crosslinking.

Table 3. Experimental data of neat ultem 1000 resin under various heat treatments.

Sample	Condition of Heat Treatment	Atmosphere	T <sub>g</sub> From DMA (°C)	Color Change	Dissolving Time in Solvent (Methylene Chloride)
A	No treatment		210	None	Less than 2 hr
B	330 °C, 30 min	Nitrogen	210	None	Less than 2 hr
C	330 °C, 30 min	Air	210	Mild	3 hr
D	350 °C, 30 min	Nitrogen	210	None	4hr
E	350 °C, 60 min	Nitrogen	210	Mild	5 hr
F	350 °C, 30 min	Air	210	Moderate	6 hr
G	350 °C, 60 min	Air	210	Moderate	Some left over as a gel
H	400 °C, 30 min	Nitrogen	210	Moderate	Some left over as a gel
I	400 °C, 60 min	Nitrogen	210	Moderate	Some left over as a gel
J	400 °C, 30 min	Air	210	Severe	Some left over as a gel
K	400 °C, 60 min	Air	210	Severe	Some left over as a gel

Results from GPC analysis are shown in Table 4. Neat resin and prepreg specimens were tested under various thermal histories in air, nitrogen, and vacuum atmospheres. All the GPC curve areas were intensity normalized with the neat resin case (sample A). In the neat resin study, no change is observed up to 350 °C for 30 min in nitrogen (A≈D). However, in the presence of air (atmospheric oxygen), significant increases in the GPC-curve areas are observed, indicating the presence of crosslinked polymer chains. Samples D and F show the effect of atmosphere, F and J show the effect of temperature, and J and K show the effect of time in a reactive atmosphere (air). The GPC area indicates the onset of crosslinking (and degradation) at lower temperatures than weight-loss tests and hence is a better tool to quantify degradation and establish process limits. For prepreg processed under vacuum conditions, some crosslinking occurs at 350 °C (1.13 compared to 1.08 baseline) while significant crosslinking degradation occurs at 400 °C. In comparison, specimens processed in air exhibit higher levels of degradation at both test temperatures, as expected.

Table 4. Degradation study of PEI and AS4/PEI prepreg using GPC.

Sample	Process	Temperature (°C)	Time (Min)	Atmosphere	Area Ratio Under the GPC Curve
A	Resin	No treatment	—	—	1.00
D	Resin	350	30	Nitrogen	1.00
F	Resin	350	30	Air	1.10
J	Resin	400	30	Air	1.13
K	Resin	400	60	Air	1.28
L	Prepreg	No treatment	—	—	1.07
M	Autoclave	330	20	Vacuum	1.08
N	Autoclave	350	60	Vacuum	1.13
O	Autoclave	400	60	Vacuum	1.60
P	Oven	330	20	Air	1.21
Q	Oven	350	30	Air	1.31
R	Oven	350	60	Air	1.39
S	Oven	400	30	Air	1.37
T	Oven	400	60	Air	1.48
U	Induction	309	1	Vacuum	1.07
V	Induction	319	1	Vacuum	1.07
W	Induction	330	1	Vacuum	1.08
X	Induction	387	1	Vacuum	1.05
Y	Induction	405	1	Vacuum	1.06

The induction-processed samples were subjected to high frequency magnetic fields for approximately 1 min, which was chosen based on design cycle times in electromagnetic-induction-based process for manufacture of laminates. Magnetic field parameters were selected to mimic process conditions in the manufacturing process. Preliminary tests performed under vacuum atmosphere indicate no measurable polymer degradations under these conditions, even though the composite laminate does reach the degradation temperatures of 380 °C and 400 °C (samples X and Y, respectively).

#### 2.2.2.4 Electrical Degradation Study

Dielectric breakdown of polymers results in localized damage, which leads to deterioration of the mechanical properties of the composite [20]. Several mechanisms can occur and lead to breakdown, such as discharge breakdown and intrinsic breakdown. In this effort, the purpose is to identify electromagnetic parameters that produce breakdown; not to elucidate the mechanisms for this breakdown. Thus, it is show that dielectric breakdown is not likely to occur during electromagnetic processing of AS4/PEI.

Breakdown measurements were performed on neat PEI films of various thicknesses. The junction of fiber overlap is the region of expected breakdown and the thickness of PEI in these regions is small (submicron). Thin films, as small as 100 nm, were fabricated using a solvent-based spin-coating technique.

The dielectric breakdown voltages for neat PEI films of various thickness are presented in Figure 20. The breakdown voltage increases as the sample thickness increases. The voltage required for breakdown in a 100-nm film of PEI is ~350 V. The voltage drop in the induced current loops during electromagnetic processing is an order of magnitude smaller. For example, the induced voltage due to a three-turn coil with a 10-A current at a frequency of 10 MHz and affecting a 0.1-m square loop in the composite is only 40 V. It may be concluded that dielectric breakdown of the matrix is unlikely during electromagnetic processing of AS4/PEI composites.

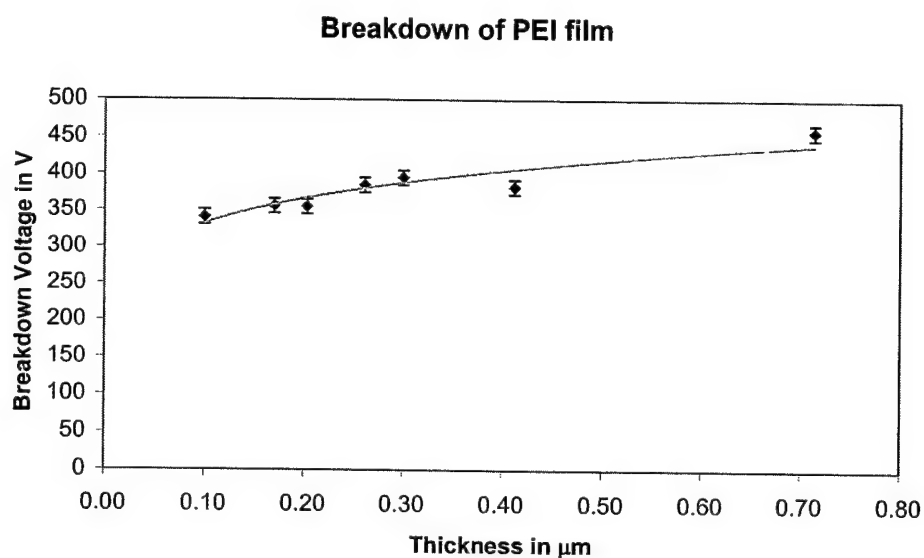


Figure 20. Breakdown voltage measurements for neat PEI films.

#### 2.2.2.5 Mechanical Performance

Short beam shear (ASTM D 2344) [21] and compression (ASTM 695) [22] tests were performed with autoclaved and electromagnetic-induction-processed AS4/PEI specimens. These two properties are directly related to the matrix properties in the composite and are sensitive to matrix degradation. High pressure (75 psi) was used in order to eliminate the void content effect on properties. Measured void contents were less than 1% for both samples. The mechanical test results are shown in Table 5 and indicate no loss in performance due to electromagnetic induction-based processing of AS4/PEI.

Table 5. Comparison of mechanical properties.

Process	Apparent Shear Strength (psi)	Compressive Strength (ksi)
Electromagnetic-Induction Processing (A) <sup>a</sup>	1,1300 ± 500	120.1 ± 1.2
Autoclave (B) <sup>b</sup>	1,1500 ± 500	118.3 ± 1.8

<sup>a</sup>Process A: Autoclaved at vacuum; induction heated; autoclaved at 75 psi.

<sup>b</sup>Process B: Autoclaved at vacuum; autoclaved at 75 psi.

### 2.2.3 Induction Coil Design

A major advantage of induction heating technology is coil-design flexibility. The size and shape of an induction coil can be "fit," or matched, to the composite part that is to be heated, even for geometrically complex shapes. It is also possible to use a simple coil design and heat complex geometric shapes using programmed motion with a robot. Based on induction coil models, coil designs were developed for a 12-in wide laminate process. This involves lamination or consolidation of an 8-ply prepreg in the desired orientation into a consolidated laminate with specified quality. This is achieved by induction heating the prepreg stack up to process temperature, followed by consolidation under pressure.

#### 2.2.3.1 Laminator Coil Design

The function of the laminator or the lamination stage is to fabricate 8-ply thermoplastic laminates at high throughputs (~20 ft/min) and desired quality. Thus, the induction heating stage of this process step has to uniformly and rapidly heat the incoming material (8-ply prepreg stack) up to the process temperature while allowing continuous material flow, as shown in Figure 21. The challenge is to handle incoming prepreg stacks of various orientations and still meet the rapid and uniform heating requirements.

Several different coil configurations were modeled and tested resulting in the selection of a rectangular (or paperclip shaped) coil for the laminator. The coil geometry and resultant temperature profiles are shown in Figures 22 and 23, respectively.

Work is in progress to optimize the rectangular coil geometry to further reduce temperature gradients and improve final laminate quality.

#### 2.2.4 Conclusions to Induction-Based Thermoplastic Composite Lamination

Work to date has established that induction heating is a key technology component for the use of carbon/thermoplastics in Army composite structures.

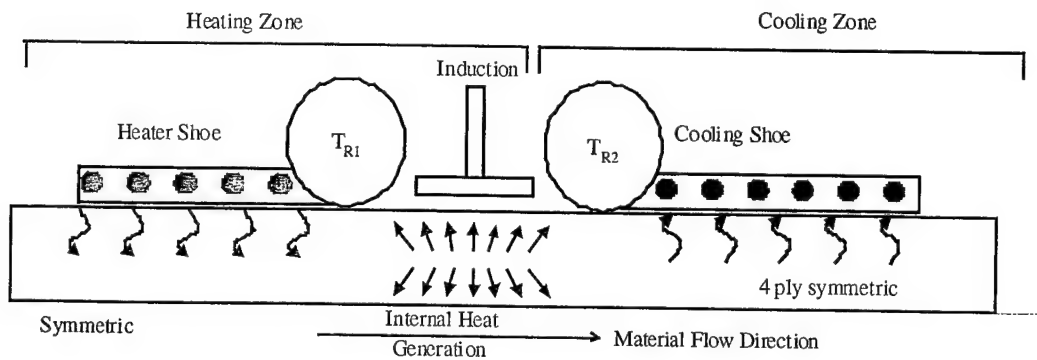


Figure 21. Process schematic of lamination stage in a production line.

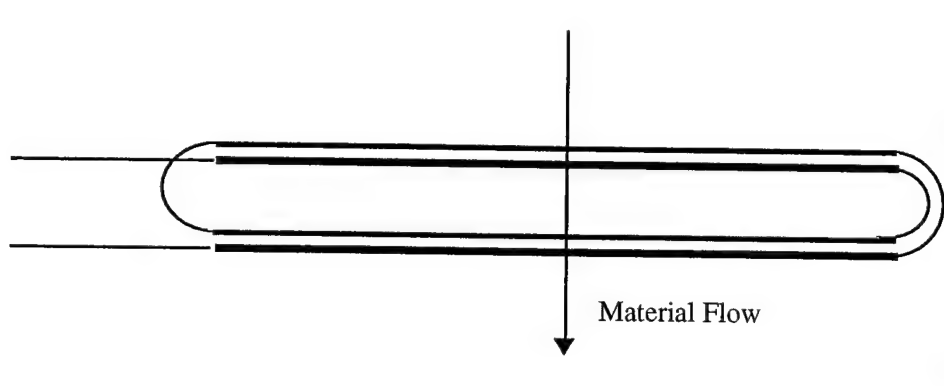


Figure 22. Schematic of rectangular coil for lamination stage.

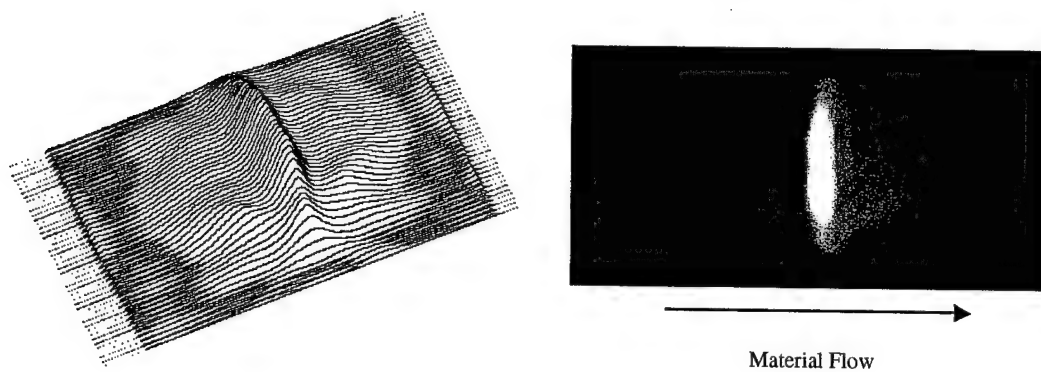


Figure 23. Temperature profiles of 8-ply stack with rectangular coil.

The ability to fabricate laminates from thermoplastic polymers while meeting performance and throughput requirements will allow future designs to replace environmentally hazardous thermoset-processing techniques with low-impact alternatives and potentially eliminate a substantial volume of hazardous waste production for the Army and its contractors.

---

### 3. References

---

1. Fink, B. K. "Non-Polluting Composites Repair and Remanufacturing for Military Applications." Annual Technical Report - Strategic Environmental Research and Development Program (SERDP), PP1109, Arlington, VA, December 1998.
2. Bourban, P. E., E. Karamuk, R. C. Don, and J. W. Gillespie, Jr. "Induction Heating for Rehabilitation of Steel Structures Using Composites." *Proceedings ASCE Materials Engineering Conference, New Materials and Methods for Repair*, San Diego, CA, 1994.
3. Benatar, A., and T. G. Gutowski. "Methods for Fusion-Bonding Thermoplastic Composites." *SAMPE Quarterly*, vol. 18, no. 1, pp. 35-42, October 1986.
4. Buckley, J. D., and R. L. Fox. "Rapid Electromagnetic Induction Bonding of Composites, Plastics and Metals." *Materials Research Society Symposium*, vol. 124, Boston, MA, 1988.
5. Lawless, G. W., and T. J. Reinhart. "Study of the Induction Heating of Organic Composites." *International SAMPE Conference*, Toronto, Canada, October 1992.
6. Buckley, J. D., R. L. Fox, and J. R. Tyeryar. "Seam Bonding of Graphite Reinforced Composite Panels." *NASA Advanced Composites Conference*, 1986.
7. Tay, T. E., S. Yarlagadda, J. W. Gillespie, Jr., B. K. Fink, and S. H. McKnight. "Accelerated Curing of Adhesives in Bonded Joints by Induction Heating." *Journal of Composite Materials*, vol. 33, no. 17, pp. 1643-1664, 1999.
8. McKnight, S. H., B. K. Fink, S. Wells, S. Yarlagadda, and J. W. Gillespie, Jr. "Accelerated Curing of Epoxy Paste Adhesives for Repair of Composites Using Induction Heating." *Proceedings of ANTEC 98*, Society of Plastics Engineers, Brookfield, CT, 1998.
9. Yarlagadda, S., J. W. Gillespie, Jr., and B. K. Fink. "Resistive Susceptor Design for Uniform Heating During Induction Bonding of Composites." *Journal of Thermoplastic Composite Materials*, vol. 11, no. 4, pp. 321-337, July 1998.
10. Firko, J., S. Yarlagadda, B. K. Fink, and J. W. Gillespie, Jr. "Optimization of Heat Generation in Induction Bonding Using Metal Mesh Susceptors." *Proceedings of the American Society for Composites Thirteenth Technical Conference (CD-ROM)*, pp. 468-480, edited by A. J. Vizzini, published by American Society for Composites, Los Angeles, CA, and distributed by Composites Research Laboratory, University of Maryland, College Park, MD, 1998.

11. American Society for Testing and Materials. *Standard Test Method for Apparent Shear Strength of Single-Lap-Joint Adhesively Bonded Metal Specimens by Tension Loading (Metal-to-Metal)*, ASTM D 1002-94, Conshohocken, PA, 1994.
12. Plonsey, R., and R. E. Collin. *Principles and Applications of Electromagnetic Fields*. New York, NY: McGraw-Hill, 1961.
13. Fink, B. K., R. L. McCullough, and J. W. Gillespie Jr. "Experimental Verification of Models for Induction Heating of Continuous-Carbon-Fiber Composites." *Polymer Composites*, vol. 17, no. 2, pp. 198-209, 1996.
14. Fink, B. K., J. W. Gillespie, Jr., and R. L. McCullough. "Induction Heating of Cross-Ply Carbon Fiber Thermoplastic Composites." *Proceedings of ANTEC 92*, Society of Plastics Engineers, Brookfield, CT, 1992.
15. Lin, W., A. K. Miller, and O. Buneman. "Predictive Capabilities of an Induction Heating Model for Complex-Shape Graphite Fiber/Polymer Matrix Composites." *24<sup>th</sup> International SAMPE Technical Conference*, 20-22 October 1992.
16. Miller, A. K., C. Chang, A. Payne, M. Gur, E. Menzel, and A. Peled. "The Nature of Induction Heating in Graphite-Fiber Polymer-Matrix Composite Materials." *SAMPE Journal*, vol. 26, no. 4, p. 37, August 1990.
17. Fink, B. K., S. Yarlagadda, and J. W. Gillespie, Jr. "Design of a Resistive Susceptor for Uniform Heating During Induction Bonding of Composites." ARL-TR-2148, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, January 2000.
18. Sarjeant, W. J. "A cursory Examination of the Nature, Effects and Control of Electromagnetic Fields." ARL-TR-2232, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, May 2000.
19. Fink, B. K., R. L. McCullough, and J. W. Gillespie, Jr. "Induction Heating of Carbon-Fiber Composites: Electrical Potential Distribution Model." ARL-TR-2130, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, November 1999.
20. Fink, B. K., R. L. McCullough, and J. W. Gillespie, Jr. "On the Influence of Moisture on Dielectric Properties of Polyetheretherketone (PEEK) Carbon-Fiber Composites." ARL-TR-2236, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, June 2000.
21. American Society for Testing and Materials. "Standard Test Method for Apparent Interlaminar Shear Strength of Parallel Fiber Composites by Short-Beam Method." ASTM 2344-84, Conshohocken, PA, 1984.
22. American Society for Testing and Materials. "Standard Test Method for Compressive Properties of Rigid Plastics." ASTM 695-96, Conshohocken, PA, 1996.

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	DEFENSE TECHNICAL INFORMATION CENTER DTIC DDA 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218
1	HQDA DAMO FDT 400 ARMY PENTAGON WASHINGTON DC 20310-0460
1	OSD OUSD(A&T)/ODDDR&E(R) R J TREW THE PENTAGON WASHINGTON DC 20301-7100
1	DPTY CG FOR RDA US ARMY MATERIEL CMD AMCRDA 5001 EISENHOWER AVE ALEXANDRIA VA 22333-0001
1	INST FOR ADVNCD TCHNLGY THE UNIV OF TEXAS AT AUSTIN PO BOX 202797 AUSTIN TX 78720-2797
1	DARPA B KASPAR 3701 N FAIRFAX DR ARLINGTON VA 22203-1714
1	US MILITARY ACADEMY MATH SCI CTR OF EXCELLENCE MADN MATH MAJ HUBER THAYER HALL WEST POINT NY 10996-1786
1	DIRECTOR US ARMY RESEARCH LAB AMSRL D D R SMITH 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	DIRECTOR US ARMY RESEARCH LAB AMSRL DD 2800 POWDER MILL RD ADELPHI MD 20783-1197

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	DIRECTOR US ARMY RESEARCH LAB AMSRL CI AI R RECORDS MGMT 2800 POWDER MILL RD ADELPHI MD 20783-1145
3	DIRECTOR US ARMY RESEARCH LAB AMSRL CI LL 2800 POWDER MILL RD ADELPHI MD 20783-1145
1	DIRECTOR US ARMY RESEARCH LAB AMSRL CI AP 2800 POWDER MILL RD ADELPHI MD 20783-1197
<u>ABERDEEN PROVING GROUND</u>	
4	DIR USARL AMSRL CI LP (BLDG 305)

NO. OF  
COPIES ORGANIZATION

1 DIRECTOR  
US ARMY RESEARCH LAB  
AMSRL CP CA  
D SNIDER  
2800 POWDER MILL RD  
ADELPHI MD 20783-1145

1 DIRECTOR  
US ARMY RESEARCH LAB  
AMSRL OP SD TA  
2800 POWDER MILL RD  
ADELPHI MD 20783-1145

3 DIRECTOR  
US ARMY RESEARCH LAB  
AMSRL OP SD TL  
2800 POWDER MILL RD  
ADELPHI MD 20783-1145

1 DIRECTOR  
US ARMY RESEARCH LAB  
AMSRL OP SD TP  
2800 POWDER MILL RD  
ADELPHI MD 20783-1145

1 DIRECTOR  
DA OASARDA  
SARD SO  
103 ARMY PENTAGON  
WASHINGTON DC 20310-0103

1 DPTY ASST SECY FOR R&T  
SARD TT  
THE PENTAGON  
RM 3EA79  
WASHINGTON DC 20301-7100

1 COMMANDER  
US ARMY MATERIEL CMD  
AMXMI INT  
5001 EISENHOWER AVE  
ALEXANDRIA VA 22333-0001

1 COMMANDER  
US ARMY ARDEC  
AMSTA AR QAC T C  
C PATEL  
PICATINNY ARSENAL NJ  
07806-5000

NO. OF  
COPIES ORGANIZATION

1 COMMANDER  
US ARMY ARDEC  
AMSTA AR M  
D DEMELLA  
PICATINNY ARSENAL NJ  
07806-5000

3 COMMANDER  
US ARMY ARDEC  
AMSTA AR FSA  
A WARNASH  
B MACHAK  
M CHIEFA  
PICATINNY ARSENAL NJ  
07806-5000

2 COMMANDER  
US ARMY ARDEC  
AMSTA AR FSP G  
M SCHIKSNIS  
D CARLUCCI  
PICATINNY ARSENAL NJ  
07806-5000

1 COMMANDER  
US ARMY ARDEC  
AMSTA AR FSP A  
P KISATSKY  
PICATINNY ARSENAL NJ  
07806-5000

2 COMMANDER  
US ARMY ARDEC  
AMSTA AR CCH C  
H CHANIN  
S CHICO  
PICATINNY ARSENAL NJ  
07806-5000

1 COMMANDER  
US ARMY ARDEC  
AMSTA AR QAC T  
D RIGOGLIOSO  
PICATINNY ARSENAL NJ  
07806-5000

1 COMMANDER  
US ARMY ARDEC  
AMSTA AR SRE  
D YEE  
PICATINNY ARSENAL NJ  
07806-5000

NO. OF  
COPIES   ORGANIZATION

9   COMMANDER  
US ARMY ARDEC  
AMSTA AR CCH B  
P DONADIA  
F DONLON  
P VALENTI  
C KNUTSON  
G EUSTICE  
S PATEL  
G WAGNECZ  
R SAYER  
F CHANG  
PICATINNY ARSENAL NJ  
07806-5000

6   COMMANDER  
US ARMY ARDEC  
AMSTA AR CCL  
F PUZYCKI  
R MCHUGH  
D CONWAY  
E JAROSZEWSKI  
R SCHLENNER  
M CLUNE  
PICATINNY ARSENAL NJ  
07806-5000

1   COMMANDER  
US ARMY ARDEC  
AMSTA AR WET  
T SACHAR  
BLDG 172  
PICATINNY ARSENAL NJ  
07806-5000

1   COMMANDER  
US ARMY ARDEC  
AMSTA ASF  
PICATINNY ARSENAL NJ  
07806-5000

1   US ARMY ARDEC  
INTELLIGENCE SPECIALIST  
AMSTA AR WEL F  
M GUERRIERE  
PICATINNY ARSENAL NJ  
07806-5000

NO. OF  
COPIES   ORGANIZATION

11   PM TMAS  
SFAE GSSC TMA  
R MORRIS  
C KIMKER  
D GUZOWICZ  
E KOPACZ  
R ROESER  
R DARCY  
R MCDANOLDS  
L D ULISSE  
C ROLLER  
J MCGREEN  
B PATTTER  
PICATINNY ARSENAL NJ  
07806-5000

2   PEO FIELD ARTILLERY SYS  
SFAE FAS PM  
H GOLDMAN  
T MCWILLIAMS  
PICATINNY ARSENAL NJ  
07806-5000

1   COMMANDER  
US ARMY ARDEC  
AMSTA AR WEA  
J BRESCIA  
PICATINNY ARSENAL NJ  
07806-5000

1   COMMANDER  
US ARMY ARDEC  
PRODUCTION BASE  
MODERN ACTY  
AMSMC PBM K  
PICATINNY ARSENAL NJ  
07806-5000

6   PM SADARM  
SFAE GCSS SD  
COL B ELLIS  
M DEVINE  
R KOWALSKI  
W DEMASSI  
J PRITCHARD  
S HROWNAK  
PICATINNY ARSENAL NJ  
07806-5000

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	COMMANDER US ARMY TACOM PM ABRAMS SFAE ASM AB 6501 ELEVEN MILE RD WARREN MI 48397-5000
3	COMMANDER US ARMY TACOM PM TACTICAL VEHICLES SFAE TVL SFAE TVM SFAE TVH 6501 ELEVEN MILE RD WARREN MI 48397-5000
1	COMMANDER US ARMY TACOM PM BFVS SFAE ASM BV 6501 ELEVEN MILE RD WARREN MI 48397-5000
1	COMMANDER US ARMY TACOM PM AFAS SFAE ASM AF 6501 ELEVEN MILE RD WARREN MI 48397-5000
1	COMMANDER US ARMY TACOM PM RDT&E SFAE GCSS W AB J GODELL 6501 ELEVEN MILE RD WARREN MI 48397-5000
2	COMMANDER US ARMY TACOM PM SURV SYS SFAE ASM SS T DEAN SFAE GCSS W GSI M D COCHRAN 6501 ELEVEN MILE RD WARREN MI 48397-5000

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	COMMANDER US ARMY TACOM PM SURVIVABLE SYSTEMS SFAE GCSS W GSI H M RYZYI 6501 ELEVEN MILE RD WARREN MI 48397-5000
1	COMMANDER US ARMY TACOM PM BFV SFAE GCSS W BV S DAVIS 6501 ELEVEN MILE RD WARREN MI 48397-5000
1	COMMANDER US ARMY TACOM PM LIGHT TACTICAL VHCLS AMSTA TR S A J MILLS MS 209 6501 ELEVEN MILE RD WARREN MI 48397-5000
1	COMMANDER US ARMY TACOM PM GROUND SYSTEMS INTEGRATION SFAE GCSS W GSI R LABATILLE 6501 ELEVEN MILE RD WARREN MI 48397-5000
1	COMMANDER US ARMY TACOM CHIEF ABRAMS TESTING SFAE GCSS W AB QT T KRASKIEWICZ 6501 ELEVEN MILE RD WARREN MI 48397-5000
1	COMMANDER US ARMY TACOM AMSTA SF WARREN MI 48397-5000
1	COMMANDER WATERVLIET ARSENAL SMCWV QAE Q B VANINA BLDG 44 WATERVLIET NY 12189-4050

NO. OF  
COPIES ORGANIZATION

15 COMMANDER  
US ARMY TACOM  
AMSTA TR R  
J CHAPIN  
R MCCLELLAND  
D THOMAS  
J BENNETT  
D HANSEN  
AMSTA JSK  
S GOODMAN  
J FLORENCE  
K IYER  
D TEMPLETON  
A SCHUMACHER  
AMSTA TR D  
D OSTBERG  
L HINOJOSA  
B RAJU  
AMSTA CS SF  
H HUTCHINSON  
F SCHWARZ  
WARREN MI 48397-5000

1 COMMANDER  
WATERVLIET ARSENAL  
SMCWV SPM  
T MCCLOSKEY  
BLDG 253  
WATERVLIET NY 12189-4050

2 TSM ABRAMS  
ATZK TS  
S JABURG  
W MEINSHAUSEN  
FT KNOX KY 40121

11 BENET LABORATORIES  
AMSTA AR CCB  
R FISCELLA  
G D ANDREA  
E KATHE  
M SCAVULO  
G SPENCER  
P WHEELER  
K MINER  
J VASILAKIS  
G FRIAR  
R HASENBEIN  
AMSTA CCB R  
S SOPOK  
WATERVLIET NY 12189-4050

NO. OF  
COPIES ORGANIZATION

3 ARMOR SCHOOL  
ATZK TD  
R BAUEN  
J BERG  
A POMEY  
FT KNOX KY 40121

2 HQ IOC TANK  
AMMUNITION TEAM  
AMSIO SMT  
R CRAWFORD  
W HARRIS  
ROCK ISLAND IL 61299-6000

1 DIRECTOR  
US ARMY AMCOM  
SFAE AV RAM TV  
D CALDWELL  
BLDG 5300  
REDSTONE ARSENAL AL  
35898

2 COMMANDER  
US ARMY AMCOM  
AVIATION APPLIED TECH DIR  
J SCHUCK  
FT EUSTIS VA 23604-5577

1 US ARMY CERL  
R LAMPO  
2902 NEWMARK DR  
CHAMPAIGN IL 61822

4 DIRECTOR  
US ARMY CECOM  
NIGHT VISION &  
ELECTRONIC SENSORS DIR  
AMSEL RD NV CM CCD  
R ADAMS  
R MCLEAN  
A YINGST  
AMSEL RD NV VISP  
E JACOBS  
10221 BURBECK RD  
FT BELVOIR VA 22060-5806

2 US ARMY CORPS OF ENGINEERS  
CERD C  
T LIU  
CEW ET  
T TAN  
20 MASS AVE NW  
WASHINGTON DC 20314

NO. OF  
COPIES ORGANIZATION

1 US ARMY COLD REGIONS  
RSCH & ENGRNG LAB  
P DUTTA  
72 LYME RD  
HANOVER NH 03755

1 SYSTEM MANAGER ABRAMS  
ATZK TS  
LTC J H NUNN  
BLDG 1002 RM 110  
FT KNOX KY 40121

1 USA SBCCOM PM SOLDIER SPT  
AMSSB PM RSS A  
J CONNORS  
KANSAS ST  
NATICK MA 01760-5057

3 BALLISTICS TEAM  
AMSSB RIP  
PHIL CUNNIFF  
JOHN SONG  
WALTER ZUKAS  
KANSAS ST  
NATICK MA 01760-5057

2 MATERIAL SCIENCE TEAM  
AMSSB RSS  
JEAN HERBERT  
MICHAEL SENNETT  
KANSAS ST  
NATICK MA 01760-5057

2 DAVID TAYLOR RESEARCH CTR  
R ROCKWELL  
W PHYLLAIER  
BETHESDA MD 20054-5000

1 OFC OF NAVAL RESEARCH  
D SIEGEL CODE 351  
800 N QUINCY ST  
ARLINGTON VA 22217-5660

1 NAVAL SURFACE WARFARE CTR  
DAHLGREN DIV CODE G06  
DAHLGREN VA 22448

1 NAVAL SURFACE WARFARE CTR  
TECH LIBRARY CODE 323  
17320 DAHLGREN RD  
DAHLGREN VA 22448

NO. OF  
COPIES ORGANIZATION

8 DIRECTOR  
US ARMY NATIONAL GROUND  
INTELLIGENCE CTR  
D LEITER  
M HOLTUS  
M WOLFE  
S MINGLEDORF  
J GASTON  
W GSTATTENBAUER  
R WARNER  
J CRIDER  
220 SEVENTH ST NE  
CHARLOTTESVILLE VA 22091

6 US ARMY SBCCOM  
SOLDIER SYSTEMS CENTER  
BALLISTICS TEAM  
J WARD  
MARINE CORPS TEAM  
J MACKIEWICZ  
BUS AREA ADVOCACY TEAM  
W HASKELL  
SSCNC WST  
W NYKVIST  
T MERRILL  
S BEAUDOIN  
KANSAS ST  
NATICK MA 01760-5019

9 US ARMY RESEARCH OFC  
A CROWSON  
J CHANDRA  
H EVERETT  
J PRATER  
R SINGLETON  
G ANDERSON  
D STEPP  
D KISEROW  
J CHANG  
PO BOX 12211  
RESEARCH TRIANGLE PARK NC  
27709-2211

3 NAVAL RESEARCH LAB  
I WOLOCK CODE 6383  
R BADALIAN CODE 6304  
L GAUSE  
WASHINGTON DC 20375

1 NAVAL SURFACE WARFARE CTR  
CRANE DIVISION  
M JOHNSON CODE 20H4  
LOUISVILLE KY 40214-5245

NO. OF  
COPIES   ORGANIZATION

2   COMMANDER  
NAVAL SURFACE WARFARE CTR  
CARDEROCK DIVISION  
R PETERSON CODE 2020  
M CRITCHFIELD CODE 1730  
BETHESDA MD 20084

2   NAVAL SURFACE WARFARE CTR  
U SORATHIA  
C WILLIAMS CD 6551  
9500 MACARTHUR BLVD  
WEST BETHESDA MD 20817

1   DAVID TAYLOR RESEARCH CTR  
SHIP STRUCTURES  
& PROTECTION  
DEPT CODE 1702  
BETHESDA MD 20084

8   NAVAL SURFACE WARFARE CTR  
J FRANCIS CODE G30  
D WILSON CODE G32  
R D COOPER CODE G32  
J FRAYSSE CODE G33  
E ROWE CODE G33  
T DURAN CODE G33  
L DE SIMONE CODE G33  
R HUBBARD CODE G33  
DAHLGREN VA 22448

1   NAVAL SEA SYSTEMS CMD  
D LIESE  
2531 JEFFERSON DAVIS HWY  
ARLINGTON VA 22242-5160

1   NAVAL SURFACE WARFARE CTR  
M LACY CODE B02  
17320 DAHLGREN RD  
DAHLGREN VA 22448

1   OFC OF NAVAL RES  
J KELLY  
800 NORTH QUINCEY ST  
ARLINGTON VA 22217-5000

2   NAVAL SURFACE WARFARE CTR  
CARDEROCK DIVISION  
R CRANE CODE 2802  
C WILLIAMS CODE 6553  
3A LEGGETT CIR  
BETHESDA MD 20054-5000

NO. OF  
COPIES   ORGANIZATION

1   EXPEDITIONARY WARFARE  
DIV N85  
F SHOUP  
2000 NAVY PENTAGON  
WASHINGTON DC 20350-2000

1   AFRL MLBC  
2941 P ST RM 136  
WRIGHT PATTERSON AFB OH  
45433-7750

1   AFRL MLSS  
R THOMSON  
2179 12TH ST RM 122  
WRIGHT PATTERSON AFB OH  
45433-7718

2   AFRL  
F ABRAMS  
J BROWN  
BLDG 653  
2977 P ST STE 6  
WRIGHT PATTERSON AFB OH  
45433-7739

1   AFRL MLS OL  
L COULTER  
7278 4TH ST  
BLDG 100 BAY D  
HILL AFB UT 84056-5205

1   OSD  
JOINT CCD TEST FORCE  
OSD JCCD  
R WILLIAMS  
3909 HALLS FERRY RD  
VICKSBURG MS 29180-6199

1   DEFENSE NUCLEAR AGENCY  
INNOVATIVE CONCEPTS DIV  
6801 TELEGRAPH RD  
ALEXANDRIA VA 22310-3398

1   WATERWAYS EXPERIMENT  
D SCOTT  
3909 HALLS FERRY RD SC C  
VICKSBURG MS 39180

2   FAA  
TECH CENTER  
P SHYPRYKEVICH AAR 431  
ATLANTIC CITY NJ 08405

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
3	DARPA M VANFOSSEN S WAX L CHRISTODOULOU 3701 N FAIRFAX DR ARLINGTON VA 22203-1714
2	SERDP PROGRAM OFC PM P2 C PELLERIN B SMITH 901 N STUART ST STE 303 ARLINGTON VA 22203
1	FAA MIL HDBK 17 CHAIR L ILCEWICZ 1601 LIND AVE SW ANM 115N RESTON VA 98055
1	US DEPT OF ENERGY OFC OF ENVIRONMENTAL MANAGEMENT P RITZCOVAN 19901 GERMANTOWN RD GERMANTOWN MD 20874-1928
1	DIRECTOR LLNL F ADDESSIO MS B216 PO BOX 1633 LOS ALAMOS NM 87545
5	DIRECTOR LLNL R CHRISTENSEN S DETERESA F MAGNESS M FINGER MS 313 M MURPHY L 282 PO BOX 808 LIVERMORE CA 94550
1	OAK RIDGE NATIONAL LABORATORY R M DAVIS PO BOX 2008 OAK RIDGE TN 37831-6195

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	OAK RIDGE NATIONAL LABORATORY C EBERLE MS 8048 PO BOX 2009 OAK RIDGE TN 37831
1	OAK RIDGE NATIONAL LABORATORY C D WARREN MS 8039 PO BOX 2009 OAK RIDGE TN 37922
7	NIST R PARNAS J DUNKERS M VANLANDINGHAM MS 8621 J CHIN MS 8621 D HUNSTON MS 8543 J MARTIN MS 8621 D DUTHINH MS 8611 100 BUREAU DR GAITHERSBURG MD 20899
1	HYDROGEOLOGIC INC SERDP ESTCP SPT OFC S WALSH 1155 HERNDON PKWY STE 900 HERNDON VA 20170
3	DIRECTOR SANDIA NATIONAL LABS APPLIED MECHANICS DEPT DIV 8241 J HANDROCK Y R KAN J LAUFFER PO BOX 969 LIVERMORE CA 94550-0096
3	NASA LANGLEY RSCH CTR AMSRL VS W ELBER MS 266 F BARTLETT JR MS 266 G FARLEY MS 266 HAMPTON VA 23681-0001
1	NASA LANGLEY RSCH CTR T GATES MS 188E HAMPTON VA 23661-3400
1	USDOT FEDERAL RAILRD M FATEH RDV 31 WASHINGTON DC 20590

NO. OF  
COPIES ORGANIZATION

1 FHWA  
E MUNLEY  
6300 GEORGETOWN PIKE  
MCLEAN VA 22101

1 CENTRAL INTLLGNC AGNCY  
OTI WDAG GT  
W L WALTMAN  
PO BOX 1925  
WASHINGTON DC 20505

1 MARINE CORPS  
INTELLIGENCE ACTIVITY  
D KOSITZKE  
3300 RUSSELL RD STE 250  
QUANTICO VA 22134-5011

1 DIRECTOR  
NATIONAL GRND INTLLGNC CTR  
IANG TMT  
220 SEVENTH ST NE  
CHARLOTTESVILLE VA  
22902-5396

1 DIRECTOR  
DEFENSE INTLLGNC AGNCY  
TA 5  
K CRELLING  
WASHINGTON DC 20310

1 GRAPHITE MASTERS INC  
J WILLIS  
3815 MEDFORD ST  
LOS ANGELES CA 90063-1900

1 ADVANCED GLASS FIBER YARNS  
T COLLINS  
281 SPRING RUN LANE STE A  
DOWNINGTON PA 19335

1 COMPOSITE MATERIALS INC  
D SHORTT  
19105 63 AVE NE  
PO BOX 25  
ARLINGTON WA 98223

1 COMPOSITE MATERIALS INC  
R HOLLAND  
11 JEWEL CT  
ORINDA CA 94563

NO. OF  
COPIES ORGANIZATION

1 COMPOSITE MATERIALS INC  
C RILEY  
14530 S ANSON AVE  
SANTA FE SPRINGS CA 90670

2 COMPOSIX  
D BLAKE  
L DIXON  
120 O NEILL DR  
HEBRUN OHIO 43025

4 CYTEC FIBERITE  
R DUNNE  
D KOHLI  
M GILLIO  
R MAYHEW  
1300 REVOLUTION ST  
HAVRE DE GRACE MD 21078

2 SIMULA  
J COLTMAN  
R HUYETT  
10016 S 51ST ST  
PHOENIX AZ 85044

1 SIOUX MFG  
B KRIEL  
PO BOX 400  
FT TOTTEN ND 58335

2 PROTECTION MATERIALS INC  
M MILLER  
F CRILLEY  
14000 NW 58 CT  
MIAMI LAKES FL 33014

3 FOSTER MILLER  
J J GASSNER  
M ROYLANCE  
W ZUKAS  
195 BEAR HILL RD  
WALTHAM MA 02354-1196

1 ROM DEVELOPMENT CORP  
R O MEARA  
136 SWINEBURNE ROW  
BRICK MARKET PLACE  
NEWPORT RI 02840

1 O GARA HESS & EISENHARDT  
M GILLESPIE  
9113 LESANT DR  
FAIRFIELD OH 45014

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	TEXTRON SYSTEMS T FOLTZ M TREASURE 201 LOWELL ST WILMINGTON MA 08870-2941
1	JPS GLASS L CARTER PO BOX 260 SLATER RD SLATER SC 29683
2	MILLIKEN RSCH CORP H KUHN M MACLEOD PO BOX 1926 SPARTANBURG SC 29303
1	CONNEAUGHT INDUSTRIES INC J SANTOS PO BOX 1425 COVENTRY RI 02816
2	BATTELLE NATICK OPNS J CONNORS B HALPIN 209 W CENTRAL ST STE 302 NATICK MA 01760
1	ARMTEC DEFENSE PRODUCTS S DYER 85 901 AVE 53 PO BOX 848 COACHELLA CA 92236
1	GLCC INC J RAY 103 TRADE ZONE DR STE 26C WEST COLUMBIA SC 29170
3	PACIFIC NORTHWEST LAB M SMITH G VAN ARSDALE R SHIPPELL PO BOX 999 RICHLAND WA 99352
2	AMOCO PERFORMANCE PRODUCTS M MICHNO JR J BANISAUKAS 4500 MCGINNIS FERRY RD ALPHARETTA GA 30202-3944

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	SAIC M PALMER 1410 SPRING HILL RD STE 400 MS SH4 5 MCLEAN VA 22102
1	SAIC G CHRYSSOMALLIS 3800 W 80TH ST STE 1090 BLOOMINGTON MN 55431
1	AAI CORPORATION T G STASTNY PO BOX 126 HUNT VALLEY MD 21030-0126
1	APPLIED COMPOSITES W GRISCH 333 NORTH SIXTH ST ST CHARLES IL 60174
3	ALLIANT TECHSYSTEMS INC J CONDON E LYNAM J GERHARD WV01 16 STATE RT 956 PO BOX 210 ROCKET CENTER WV 26726-0210
1	CUSTOM ANALYTICAL ENG SYS INC A ALEXANDER 13000 TENSOR LANE NE FLINTSTONE MD 21530
1	OFC DEPUTY UNDER SEC DFNS J THOMPSON 1745 JEFFERSON DAVIS HWY CRYSTAL SQ 4 STE 501 ARLINGTON VA 22202
1	PROJECTILE TECHNOLOGY INC 515 GILES ST HAVRE DE GRACE MD 21078
1	LORAL VOUGHT SYSTEMS K COOK 1701 W MARSHALL DR GRAND PRAIRIE TX 75051

NO. OF  
COPIES   ORGANIZATION

3    HEXCEL INC  
     R BOE  
     PO BOX 18748  
     SALT LAKE CITY UT 84118

8    ALLIANT TECHSYSTEMS INC  
     C CANDLAND MN11 2830  
     C AAKHUS MN11 2830  
     B SEE MN11 2439  
     N VLAHAKUS MN11 2145  
     R DOHRN MN11 2830  
     S HAGLUND MN11 2439  
     M HISSONG MN11 2830  
     D KAMDAR MN11 2830  
     600 SECOND ST NE  
     HOPKINS MN 55343-8367

5    AEROJET GEN CORP  
     D PILLASCH  
     T COULTER  
     C FLYNN  
     D RUBAREZUL  
     M GREINER  
     1100 WEST HOLLYVALE ST  
     AZUSA CA 91702-0296

1    HERCULES INC  
     HERCULES PLAZA  
     WILMINGTON DE 19894

1    BRIGS COMPANY  
     J BACKOFEN  
     2668 PETERBOROUGH ST  
     HERNDON VA 22071-2443

1    ZERNOW TECHNICAL SERVICES  
     L ZERNOW  
     425 W BONITA AVE STE 208  
     SAN DIMAS CA 91773

2    OLIN CORPORATION  
     FLINCHBAUGH DIV  
     E STEINER  
     B STEWART  
     PO BOX 127  
     RED LION PA 17356

1    OLIN CORPORATION  
     L WHITMORE  
     10101 NINTH ST NORTH  
     ST PETERSBURG FL 33702

NO. OF  
COPIES   ORGANIZATION

1    GKN AEROSPACE  
     D OLDS  
     15 STERLING DR  
     WALLINGFORD CT 06492

1    PRATT & WHITNEY  
     C WATSON  
     400 MAIN ST MS 114 37  
     EAST HARTFORD CT 06108

5    SIKORSKY AIRCRAFT  
     G JACARUSO  
     T CARSTENSAN  
     B KAY  
     S GARBO MS S330A  
     J ADELMANN  
     6900 MAIN ST  
     PO BOX 9729  
     STRATFORD CT 06497-9729

1    AEROSPACE CORP  
     G HAWKINS M4 945  
     2350 E EL SEGUNDO BLVD  
     EL SEGUNDO CA 90245

2    CYTEC FIBERITE  
     M LIN  
     W WEB  
     1440 N KRAEMER BLVD  
     ANAHEIM CA 92806

1    HEXCEL  
     T BITZER  
     11711 DUBLIN BLVD  
     DUBLIN CA 94568

1    BOEING  
     R BOHLMANN  
     PO BOX 516 MC 5021322  
     ST LOUIS MO 63166-0516

2    BOEING DFNSE & SPACE GP  
     W HAMMOND S 4X55  
     J RUSSELL S 4X55  
     PO BOX 3707  
     SEATTLE WA 98124-2207

2    BOEING ROTORCRAFT  
     P MINGURT  
     P HANDEL  
     800 B PUTNAM BLVD  
     WALLINGFORD PA 19086

NO. OF  
COPIES ORGANIZATION

1 BOEING  
DOUGLAS PRODUCTS DIV  
L J HART SMITH  
3855 LAKEWOOD BLVD  
D800 0019  
LONG BEACH CA 90846-0001

1 LOCKHEED MARTIN  
S REEVE  
8650 COBB DR  
D 73 62 MZ 0648  
MARIETTA GA 30063-0648

1 LOCKHEED MARTIN  
SKUNK WORKS  
D FORTNEY  
1011 LOCKHEED WAY  
PALMDALE CA 93599-2502

1 LOCKHEED MARTIN  
R FIELDS  
1195 IRWIN CT  
WINTER SPRINGS FL 32708

1 MATERIALS SCIENCES CORP  
B W ROSEN  
500 OFC CENTER DR STE 250  
FT WASHINGTON PA 19034

1 NORTHROP GRUMMAN CORP  
ELECTRONIC SENSORS  
& SYSTEMS DIV  
E SCHOCH MS V 16  
1745A W NURSERY RD  
LINTHICUM MD 21090

2 NORTHROP GRUMMAN  
ENVIRONMENTAL PROGRAMS  
R OSTERMAN  
A YEN  
8900 E WASHINGTON BLVD  
PICO RIVERA CA 90660

1 UDLP  
D MARTIN  
PO BOX 359  
SANTA CLARA CA 95052

1 UDLP  
G THOMAS  
PO BOX 58123  
SANTA CLARA CA 95052

NO. OF  
COPIES ORGANIZATION

2 UDLP  
R BARRETT MAIL DROP M53  
V HORVATICH MAIL DROP M53  
328 W BROKAW RD  
SANTA CLARA CA 95052-0359

3 UDLP  
GROUND SYSTEMS DIVISION  
M PEDRAZZI MAIL DROP N09  
A LEE MAIL DROP N11  
M MACLEAN MAIL DROP N06  
1205 COLEMAN AVE  
SANTA CLARA CA 95052

4 UDLP  
R BRYNSVOLD  
P JANKE MS 170  
4800 EAST RIVER RD  
MINNEAPOLIS MN 55421-1498

1 GDLS DIVISION  
D BARTLE  
PO BOX 1901  
WARREN MI 48090

2 GDLS  
D REES  
M PASIK  
PO BOX 2074  
WARREN MI 48090-2074

1 GDLS  
MUSKEGON OPERATIONS  
W SOMMERS JR  
76 GETTY ST  
MUSKEGON MI 49442

1 GENERAL DYNAMICS  
AMPHIBIOUS SYS  
SURVIVABILITY LEAD  
G WALKER  
991 ANNAPOLIS WAY  
WOODBIDGE VA 22191

6 INST FOR ADVANCED TECH  
H FAIR  
I MCNAB  
P SULLIVAN  
S BLESS  
W REINECKE  
C PERSAD  
3925 W BRAKER LN STE 400  
AUSTIN TX 78759-5316

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>	<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	CIVIL ENGR RSCH FOUNDATION PRESIDENT H BERNSTEIN R BELLE 1015 15TH ST NW STE 600 WASHINGTON DC 20005	1	UNIV OF WYOMING D ADAMS PO BOX 3295 LARAMIE WY 82071
1	ARROW TECH ASSOC 1233 SHELBURNE RD STE D 8 SOUTH BURLINGTON VT 05403-7700	2	PENN STATE UNIV R MCNITT C BAKIS 212 EARTH ENGR SCIENCES BLDG UNIVERSITY PARK PA 16802
1	R EICHELBERGER CONSULTANT 409 W CATHERINE ST BEL AIR MD 21014-3613	1	PENN STATE UNIV R S ENGEL 245 HAMMOND BLDG UNIVERSITY PARK PA 16801
1	UCLA MANE DEPT ENGR IV H T HAHN LOS ANGELES CA 90024-1597	1	PURDUE UNIV SCHOOL OF AERO & ASTRO C T SUN W LAFAYETTE IN 47907-1282
2	UNIV OF DAYTON RESEARCH INST R Y KIM A K ROY 300 COLLEGE PARK AVE DAYTON OH 45469-0168	1	STANFORD UNIV DEPT OF AERONAUTICS & AEROBALLISTICS S TSAI DURANT BLDG STANFORD CA 94305
1	MIT P LAGACE 77 MASS AVE CAMBRIDGE MA 01887	1	UNIV OF DAYTON J M WHITNEY COLLEGE PARK AVE DAYTON OH 45469-0240
1	IIT RESEARCH CENTER D ROSE 201 MILL ST ROME NY 13440-6916	7	UNIV OF DELAWARE CTR FOR COMPOSITE MTRLs J GILLESPIE M SANTARE G PALMESE S YARLAGADDA S ADVANI D HEIDER D KUKICH 201 SPENCER LABORATORY NEWARK DE 19716
1	GA TECH RSCH INST GA INST OF TCHNLGY P FRIEDERICH ATLANTA GA 30392	1	DEPT OF MATERIALS SCIENCE & ENGINEERING UNIVERSITY OF ILLINOIS AT URBANA CHAMPAIGN J ECONOMY 1304 WEST GREEN ST 115B URBANA IL 61801
1	MICHIGAN ST UNIV MSM DEPT R AVERILL 3515 EB EAST LANSING MI 48824-1226		
1	UNIV OF KENTUCKY L PENN 763 ANDERSON HALL LEXINGTON KY 40506-0046		

<u>NO. OF</u> <u>COPIES</u>	<u>ORGANIZATION</u>	<u>NO. OF</u> <u>COPIES</u>	<u>ORGANIZATION</u>
1	NORTH CAROLINA STATE UNIV CIVIL ENGINEERING DEPT W RASDORF PO BOX 7908 RALEIGH NC 27696-7908		<u>ABERDEEN PROVING GROUND</u>
3	THE UNIV OF TEXAS AT AUSTIN CTR FOR ELECTROMECHANICS J PRICE A WALLS J KITZMILLER 10100 BURNET RD AUSTIN TX 78758-4497	1	US ARMY MATERIEL SYSTEMS ANALYSIS P DIETZ 392 HOPKINS RD AMXSY TD APG MD 21005-5071
3	VA POLYTECHNICAL INST & STATE UNIV DEPT OF ESM M W HYER K REIFSNIDER R JONES BLACKSBURG VA 24061-0219	1	DIRECTOR US ARMY RESEARCH LAB AMSRL OP AP L APG MD 21005-5066
1	UNIV OF MARYLAND DEPT OF AEROSPACE ENGNRNG A J VIZZINI COLLEGE PARK MD 20742	105	DIR USARL AMSRL CI AMSRL CI H W STUREK AMSRL CI S A MARK AMSRL CS IO FI M ADAMSON AMSRL SL B J SMITH AMSRL SL BA AMSRL SL BL D BELY R HENRY AMSRL SL BG AMSRL SL I AMSRL WM B A HORST E SCHMIDT AMSRL WM BA F BRANDON AMSRL WM BC P PLOSTINS D LYON J NEWILL S WILKERSON A ZIELINSKI AMSRL WM BD B FORCH R FIFER R PESCE RODRIGUEZ B RICE AMSRL WM BE C LEVERITT D KOOKER AMSRL WM BR C SHOEMAKER J BORNSTEIN
1	DREXEL UNIV A S D WANG 32ND & CHESTNUT ST PHILADELPHIA PA 19104		
1	SOUTHWEST RSCH INST ENGR & MATL SCIENCES DIV J RIEGEL 6220 CULEBRA RD PO DRAWER 28510 SAN ANTONIO TX 78228-0510		

NO. OF  
COPIES ORGANIZATION

ABERDEEN PROVING GROUND (CONT)

AMSRL WM M  
D VIECHNICKI  
G HAGNAUER  
J MCCAULEY  
B TANNER  
AMSRL WM MA  
R SHUFORD  
P TOUCHET  
N BECK TAN  
AMSRL WM MA  
D FLANAGAN  
L GHIORSE  
D HARRIS  
S MCKNIGHT  
P MOY  
P PATTERSON  
G RODRIGUEZ  
A TEETS  
R YIN  
AMSRL WM MB  
B FINK  
J BENDER  
T BOGETTI  
R BOSSOLI  
L BURTON  
K BOYD  
S CORNELISON  
P DEHMER  
R DOOLEY  
W DRYSDALE  
G GAZONAS  
S GHIORSE  
D GRANVILLE  
D HOPKINS  
C HOPPEL  
D HENRY  
R KASTE  
M KLUSEWITZ  
M LEADORE  
R LIEB  
E RIGAS  
J SANDS  
D SPAGNUOLO  
W SPURGEON  
J TZENG  
E WETZEL  
AMSRL WM MB  
A FRYDMAN

NO. OF  
COPIES ORGANIZATION

ABERDEEN PROVING GROUND (CONT)

AMRSL WM MC  
J BEATTY  
E CHIN  
J MONTGOMERY  
A WERECZCAK  
J LASALVIA  
J WELLS  
AMSRL WM MD  
W ROY  
S WALSH  
AMSRL WM T  
B BURNS  
AMSRL WM TA  
W GILLICH  
T HAVEL  
J RUNYEON  
M BURKINS  
E HORWATH  
B GOOCH  
W BRUCHEY  
AMSRL WM TC  
R COATES  
AMSRL WM TD  
A DAS GUPTA  
T HADUCH  
T MOYNIHAN  
F GREGORY  
A RAJENDRAN  
M RAFTENBERG  
M BOTELER  
T WEERASOORIYA  
D DANDEKAR  
A DIETRICH  
AMSRL WM TE  
A NIILER  
J POWELL  
AMSRL SS SD  
H WALLACE  
AMSRL SS SE R  
R CHASE  
AMSRL SS SE DS  
R REYZER  
R ATKINSON  
AMSRL SE L  
R WEINRAUB  
J DESMOND  
D WOODBURY

NO. OF  
COPIES ORGANIZATION

1 LTD  
R MARTIN  
MERL  
TAMWORTH RD  
HERTFORD SG13 7DG  
UK

1 SMC SCOTLAND  
P W LAY  
DERA ROSYTH  
ROSYTH ROYAL DOCKYARD  
DUNFERMLINE FIFE KY 11 2XR  
UK

1 CIVIL AVIATION  
ADMINISTRATION  
T GOTTESMAN  
PO BOX 8  
BEN GURION INTERNL AIRPORT  
LOD 70150  
ISRAEL

1 AEROSPATIALE  
S ANDRE  
A BTE CC RTE MD132  
316 ROUTE DE BAYONNE  
TOULOUSE 31060  
FRANCE

3 DRA FORT HALSTEAD  
P N JONES  
M HINTON  
SEVEN OAKS KENT TN 147BP  
UK

1 DEFENSE RESEARCH ESTAB  
VALCARTIER  
F LESAGE  
COURCELETTE QUEBEC COA  
IRO CANADA

2 ROYAL MILITARY COLLEGE OF  
SCIENCE SHRIVENHAM  
D BULMAN  
B LAWTON  
SWINDON WILTS SN6 8LA  
UK

1 ECOLE POLYTECH  
J MANSON  
DMX LTC  
CH 1015 LAUSANNE  
SWITZERLAND

NO. OF  
COPIES ORGANIZATION

1 SWISS FEDERAL ARMAMENTS  
WKS  
W LANZ  
ALLMENDSTRASSE 86  
3602 THUN  
SWITZERLAND

1 ISRAEL INST OF  
TECHNOLOGY  
S BODNER  
FACULTY OF  
MECHANICAL ENGR  
HAIFA 3200  
ISRAEL

1 DSTO MATERIALS  
RESEARCH LAB  
NAVAL PLATFORM  
VULNERABILITY  
SHIP STRUCTURES & MTRLS DIV  
N BURMAN  
PO BOX 50  
ASCOT VALE VICTORIA  
AUSTRALIA 3032

1 ECOLE ROYAL MILITAIRE  
E CELENS  
AVE DE LA RENAISSANCE 30  
1040 BRUXELLE  
BELGIQUE

1 DEF RES ESTABLISHMENT  
VALCARTIER  
A DUPUIS  
2459 BOULEVARD PIE XI NORTH  
VALCARTIER QUEBEC  
CANADA  
PO BOX 8800 COURCELETTE  
GOA IRO QUEBEC CANADA

1 INSTITUT FRANCO ALLEMAND  
DE RECHERCHES DE SAINT LOUIS  
DE M GIRAUD  
5 RUE DU GENERAL CASSAGNOU  
BOITE POSTALE 34  
F 68301 SAINT LOUIS CEDEX  
FRANCE

1 TNO DEFENSE RESEARCH  
I H PASMAN  
POSTBUS 6006  
2600 JA DELFT  
THE NETHERLANDS

NO. OF  
COPIES   ORGANIZATION

- 1   TNO PRINS MAURITS  
LABORATORY  
R IJSSELSTEIN  
LANGE KLEIWEG 137  
PO BOX 45  
2280 AA RIJSWIJK  
THE NETHERLANDS
- 2   FOA NATL DEFENSE RESEARCH  
ESTAB  
DIR DEPT OF WEAPONS &  
PROTECTION  
B JANZON  
R HOLMLIN  
S 172 90 STOCKHOLM  
SWEDEN
- 2   DEFENSE TECH & PROC AGENCY  
GROUND  
I CREWTER  
GENERAL HERZOG HAUS  
3602 THUN  
SWITZERLAND
- 1   MINISTRY OF DEFENCE  
RAFAEL  
ARMAMENT DEVELOPMENT  
AUTH  
M MAYSELESS  
PO BOX 2250  
HAIFA 31021  
ISRAEL
- 1   DYNAMEC RESEARCH AB  
AKE PERSSON  
BOX 201  
SE 151 23 SODERTALJE  
SWEDEN
- 1   B HIRSCH  
TACHKEMONY ST 6  
NETAMUA 42611  
ISRAEL
- 1   DEUTSCHE AEROSPACE AG  
DYNAMICS SYSTEMS  
M HELD  
PO BOX 1340  
D 86523 SCHROBENHAUSEN  
GERMANY

INTENTIONALLY LEFT BLANK.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project(0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE April 2001		3. REPORT TYPE AND DATES COVERED Final, January-October 1999
4. TITLE AND SUBTITLE Non-Polluting Composites Repair and Remanufacturing for Military Applications: Induction-Based Processing			5. FUNDING NUMBERS PP1109	
6. AUTHOR(S) Bruce K. Fink, Nicholas B. Shevchenko, James M. Sands, Shridhar Yarlalagadda,* John W. Gillespie, Jr.*				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-WM-MB Aberdeen Proving Ground, MD 21005-5069			8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TR-2457	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES *University of Delaware, Newark, DE 19716				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The development of induction-based processing of carbon-fiber (CF) thermoplastic-matrix composites and accelerated cure of thermosetting adhesives has the potential to provide nonautoclave processing technology for manufacturing and repair of polymer-matrix composites (PMCs). In this report, the results of recent tests demonstrating bonding of composites using commercial off-the-shelf thermal-cure adhesives that are heat cured via an induction field using an inductive susceptor are discussed. This method of cure utilizes heat generation within metal screen-based susceptors to cure the adhesive matrix via a heat transfer mechanism. The mechanical performance of these bonds is presented in comparison with autoclave and thermally cured baselines. No substantial loss of mechanical lap-shear strength is observed in adhesive bonds processed by induction. In addition, an example of induction welding of a thermoplastic-impregnated carbon fiber (AS4) is presented. In order to successfully demonstrate induction welding for manufacture of CF composites, the degradation of the polymer in the laminates is also investigated. No measurable degradation of the polymer, either by dielectric or thermal breakdown when heated by induction, was observed.				
14. SUBJECT TERMS composite material, pollution prevention, induction-based processing, lamination, polyether imide			15. NUMBER OF PAGES 53	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED		18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED		19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED
				20. LIMITATION OF ABSTRACT UL

INTENTIONALLY LEFT BLANK.

## USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number/Author ARL-TR-2457 (Skaggs) Date of Report April 2001

2. Date Report Received \_\_\_\_\_

3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) \_\_\_\_\_

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) \_\_\_\_\_

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. \_\_\_\_\_

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) \_\_\_\_\_

CURRENT  
ADDRESS

\_\_\_\_\_  
Organization

\_\_\_\_\_  
Name

\_\_\_\_\_  
E-mail Name

\_\_\_\_\_  
Street or P.O. Box No.

\_\_\_\_\_  
City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD  
ADDRESS

\_\_\_\_\_  
Organization

\_\_\_\_\_  
Name

\_\_\_\_\_  
Street or P.O. Box No.

\_\_\_\_\_  
City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)  
(DO NOT STAPLE)